August 20, 2012

AASHTO Bridge Element Migration Programs

Program User Guide-Version 1.1

Allen R. Marshall, PMP Allen R. Marshall Consulting LLC

AASHTO Bridge Element Migration Programs

Program User Guide- Version 1.1

August 20, 2012

Prepared for

American Association of State Highway and Transportation Officials Special Committee on Bridges and Structures Technical Committee 18 - Bridge Management, Evaluation, and Rehabilitation

Matthew Farrar, PE, Chair - Idaho Department of Transportation

Project Direction by

AASHTO Bridgeware Task Force

Michael B. Johnson PE, Chair – California Department of Transportation

Prepared by

Allen R. Marshall, PMP Allen R. Marshall Consulting LLC

In Association with

Dmitry I. Gurenich, Ph.D. Gurenich Consulting LLC

Table of Contents

	Table of Exhibits	viii
1.	Introduction	1
	Background	1
	What is the Migrator?	
2.	Installation Guide	3
	Supported Operating Systems	3
	Additional Operating Environment Requirements	
	Database Requirements	
	Migrator database user privileges	
	Connecting to a database	
	Installation Summary	
	Confirm Installation	
	Upgrades	
	Removing the program	
3.	Using the Visual Element Migrator	9
	User Interface Overview	9
	Desktop tools	
	Modules	
	Getting help	
	Using the grid view	
	Selecting data from the list	
	Sorting the data	
	Applying filters to the data	
	Clearing filters	
4.	Conversion Rule Guide	22
	Background	22
	Rule Syntax	
	Syntax for a Simple Element Migration Transform Formula	
	Syntax for a Formula Using Smart Flags	24
	Syntax for a Complicated Multi-Element Transform Formula	26
	Protective System Syntax	27
	Rollup Rules	28
	Understanding Rule Processing Behavior	28

	Rule Chaining	28
	Combining Duplicate Elements	28
	Deprecating Elements	29
	Transferring Custom Element Specifications	29
	Historical Scope	31
	Structural Scope	31
5.	Rule Grammar and Syntax	33
	The Migrator language	33
	Rule Syntax Reference	34
	Syntax Details	38
	Directives	38
	TRANSFORM Directive	38
	SCOPE Directive	38
	EXCEP	39
	ROLLUP	39
	Rollup	39
	Control Structures	39
	Basic Functions	40
	Special Functions	41
	User Defined Functions	42
	Keywords	42
	Constants	42
	Variables	42
	Arithmetic Operators	43
	Logical Operators	43
	Assignment Groups	43
	ASSIGN_PCT	43
	ASSIGN_QUANT	44
	Element Targets	44
	Comments	44
	Statement Terminator	45
6.	XML Schemas	47
	Element Data	47
	Element Conversion	
	Additional Information	48
8.	Standard Migration Rules	49
9.	Glossary of Terms	56

10.	Document Change History	59
App	endix A-Installed Migrator Files	61
	Migrator Installed File Organization	61
	Organization of a Typical User's Working Directory	61
	Organization of the Program Directory	63
Inde	eX	65

Table of Exhibits

Figure 1 -Element Data Download Sql	4
Figure 2 - Startup Splash Screen	7
Figure 3 - GUI Application Opening Screen	
Figure 4 - Snippet of Settings Screen Showing File Locations	8
Figure 5 - Migrator Desktop Overview	
Figure 6 - Filter Tool Icon	10
Figure 7 - Filter Options Dialog	11
Figure 8 - Rules Editing Screen	12
Figure 9 - A Copied Rule	13
Figure 10 - New Rule Stub	13
Figure 11 - Settings Module Main Screen	15
Figure 12 - Additional Transformation Options	17
Figure 13 - Theme Selections	18
Figure 14 - Standard Data Grid	19
Figure 15 - Filter Tool Icon in Column Header	20
Figure 16 - Filter Rules by First Digit of Rule ID	21
Figure 17 - Filter Rules to Exclude Materials	22
Figure 18 - Migration Rule Source Example – Prestressed Concrete Box Girder (104)	24
Figure 19 - Migration Rule Source Example – Deck 12 with Smart Flag 358	25
Figure 20 - Appendix D, Example 3 - Multipath Example (partial)	26
Figure 21 - Automatic Generation of Associated Protective System	27
Figure 22 - Rollup Rule Syntax	28
Table 1 - Automating AASHTO Element Generation for Agency Elements	29
Figure 23- Fragment of Generated AASHTO Element Specifications	31
Figure 24 - Generalized Transform Rule Layout	34
Figure 25 - Example Rollup Rule	34
Figure 26 - How-to Read the Migrator Rules Grammar - Syntax and Notation	35
Figure 27 - ElementDataRowType xml type definition	47
Table 2 - List of Migrator Rules and Source CoRe Elements	
Table 3 - Glossary of Terms	56

1. Introduction

Background

In April 2010 the AASHTO Special Committee on Bridges and Structure (SCOBS) Technical Committee T-18 - Bridge Management, Evaluation, and Rehabilitation (T-18) approved an updated element condition data specification based on the report **AASHTO Guide Manual for Bridge Element Inspection (BEM)** ¹ submitted to the committee by its primary authors, Michael B. Johnson PE (Caltrans) and Paul Jensen PE (previously at Montana DOT). This manual changed the nature of the bridge element condition assessments significantly, in particular, providing for multi-path deterioration rather than the single-path deterioration approach of the previous AASHTO CoRe specification ('old-style elements'), as well as standardization of element condition states to 4 for all elements, and organization of elements into National Bridge Elements (NBE), intended to provide a nationwide reporting standard, and Bridge Management Elements (BME), intended to augment the NBEs with additional element types to support bridge management condition data needs. The manual for the new AASHTO element specification ('new-style elements') was first published by AASHTO in January of 2011.²

The AASHTO member States have a rich body of element data collected over several inspection cycles, in some cases over more than 15 years. These data were collected in conformance to the older CoRe specification and incorporate a considerable level of agency modifications to the standard condition state language as well as extensions with new elements not found in that specification, such as movable bridge elements.

These data are the foundation for bridge needs assessment and bridge management; preservation of this history is vital. To that end, a process and supporting software to migrate the elements from the previous specification to the new specification is of critical importance. T-18 has sponsored a software design and development project intended to fulfill that need for its member agencies. This migration utility (the 'Migrator'3) has several salient characteristics that are elaborated later in this manual. First, the Migrator is entirely conformant with the approved specification, including the technical appendix D that provides the guidelines and rules for element transformation between old-style and new-style. Second, the Migrator is entirely database independent and operates solely on standardized Xml files enforced by schemas, along with configuration and logging text files. Third, the rules are extensible to permit the several agencies that have custom elements or have modified old-style elements to incorporate their changes in the transformations. Fourth, the application provides both a batch processing console operating mode as well as an interactive rule editing and testing user interface, to support agency rule review and modifications. The Migrator application has published Xml schemas⁴ and is written with an open application programming interface (API) which permits agencies to incorporate the migration software tools into their own data processing environments as needed.

3 Shorthand application name for the AASHTO Element Migration Utility

1

¹ The **BEM** Manual is © The American Association of State Highway and Transportation Officials, January, 2011 – Washington DC.

² See **BEM**, 2011, p. 1-1

See Appendix A for the default location of these files

What is the Migrator?⁶.

The Migrator application offers an interactive environment for setting up and testing element conversion rules, downloading element data and element specifications, converting existing data and reviewing results, and setting the program operating parameters. The migrated output file can be imported to the AASHTO Pontis 5.1.3 application using the built-in import feature of that application.

A full set of old-style and new-style element specifications, tested transformation rules for NBEs and BMEs and benchmark test data files are provided with the application. These are intended as a starting point and will very likely require some additional agency customization to perform the full migration of CoRe elements to the new specification, particularly if agencies have modified the CoRe element definitions or added any agency custom elements to their inventory.⁷

This user guide provides basic installation instructions, a basic functionality overview, and examples of GUI operation. Portions of this manual are drawn from the original software design document which provides additional detail on processing logic, rule specification syntax, and Xml schemas for each of: 1) old-style and new-style type specifications; 2) conversion rules; and 3) element condition data exchange formats. Dedicated sections document the migration rules logic and syntax. It is almost certain that States will have to extend the standard rules to migrate agency defined elements or to migrate CoRe elements that have been modified, so a user must become familiar with the rules at a reasonable level of detail.

_

The author acknowledges that the name 'Migrator' is actually not a valid English word. It has been coined for the purposes of identifying this application.

These resources may be found on the project website at http://bridgeware.onjira.com. Migrator source code is distributed to member agencies at the sole discretion of AASHTO.

2. Installation Guide

Supported Operating Systems

The programs have the same environment requirements as other AASHTOWare Pontis 5.x programs. The migration utilities operate only on Intel platforms under Windows XP SP3 or Windows7. The Migrator programs are 32-bit applications. While no network or database connection is required by the applications for migration, because the transformation processing operates solely against Xml and text files, a BRIDGEWareTM database connection would be required to download Pontis CoRe element data to Xml files for processing.

Basic operating system requirements are

- The workstation should have adequate RAM and disk space to run these operating systems efficiently;
- Adequate disk space to store the exported and migrated element xml data files. The programs take up a trivial amount of disk space;
- Windows XP SP3 is supported and most of the internal testing has been performed on this platform;
- Windows 7 32 or 64 bit versions. Primary development was performed on a 64-bit platform with 32-bit program build targets;
- Windows Vista should work but has not been tested; and
- Windows Server versions should work but have not been tested.

Additional Operating Environment Requirements

A workstation also must have the following installed to run the GUI or the command line migration applications:

- .NET Framework 4, available for download from Microsoft if needed. 8
- .NET Framework 2.0, available for download from Microsoft if needed, is also required for the log4net utility used to log operations. 9
- OLEDB data adapter software for the agency's Pontis database. This is typically installed by the Pontis 5.1 installer or may be installed explicitly from the database vendor's client support disks. The OLEDB adapter/driver should be compatible with .NET 4.0.¹⁰
- A user working directory must be designated where the user has full rights. This can be located anywhere, but typically would be on the C: or D: hard drive. The command line program always assumes it is operating 'locally' with full directory privileges. The Windows GUI runs from a

Search for **dotnetfx40_full_setup.exe** or navigate to http://www.microsoft.com/downloads/en/details.aspx?familyid=9cfb2d51-5ff4-4491-b0e5-b386f32c0992&displaylang=en.

Search for dotnetfx.exe or navigate to http://www.microsoft.com/downloads/en/details.aspx?familyid=0856eacb-4362-4b0d-8edd-aab15c5e04f5&displaylang=en.

Installing the .NET frameworks and OLEDB adaptor will require administrator privileges to install.

standard Windows application installation location e.g. C:\Program Files (x86)\AASHTOWare\Bridgeware Element Migrator but starts up in the user's working directory that was specified during installation.

Database Requirements

The Migrator programs have no specific database requirements for normal operations as all processing is performed on Xml and text files. However, for downloading Pontis CoRe element data from a production system, a standard Pontis/Bridgeware 4.4 or 4.5, 5.0, 5.1 or 5.1.2 database and a client workstation supporting an OLEDB connection is required. The database vendor may be Oracle, SQL Server, SQL Server Express, or even Sybase SQL Anywhere. The application has been tested with Oracle 10/11 and SQL Server Express, but specific database versions were not tested.

The internal SQL used for the download capability is very generic and should work with any recent release. This SQL is shown in the following figure:

Figure 1 -Element Data Download Sql

```
SOL Output Statistics
SELECT bridge.brkey,
        inspevnt.inspkev.
        eleminsp.elinspdate
        eleminsp.strunitkey,
        eleminsp.elemkey,
        eleminsp.envkey,
eleminsp.quantity,
        eleminsp.elem scale factor,
         eleminsp.qtystatel,
        eleminsp.qtystate2,
eleminsp.qtystate3,
        eleminsp.gtvstate4.
         eleminsp.qtystate5
FROM eleminsp, bridge, inspevnt, roadway
WHERE (bridge.brkey = eleminsp.brkey AND bridge.brkey = inspevnt.brkey AND
         inspevnt.inspkey = eleminsp.inspkey AND
        bridge.brkey = roadway.brkey AN
roadway.on_under =
(SELECT_MIN(r2.on_under)
             FROM roadway ra
            WHERE r2.brkey = bridge.brkey)) {0} {1}
ORDER BY bridge.brkey,
            inspevnt.inspdate DESC,
            inspevnt.inspkey,
            eleminsp.elemkev,
            eleminsp.envkey
```

Migrator database user privileges

As noted above, the Migrator programs do not require any database at all to migrate element data. They process and produce xml files. However, most agencies with Bridgeware or Pontis databases will want to use the built-in extractor to download their element condition data, customized element specifications, and other information. The user ID used by the Migrator programs to connect to the database should be a standard Pontis user with standard privileges in the database in order to read from the tables required for downloading element data and element specifications. The SQL shown in the figure above requires access to several standard Pontis tables, and a standard Pontis user id typically has all the privileges required.

If Windows Trusted Authentication (Windows domain authentication) is used with SQL Server, then privileges to connect to the Pontis database must be granted by the operating system. In both authentication cases, the Migrator utility only requires the ability to connect to the database and select from the Pontis tables, as the programs perform no database updates, inserts or deletes.

Guidelines for setting up authentication are beyond the scope of this discussion but details and examples are available in the Pontis user manual or the SQL Server/SQL Express/Oracle built-in help.

Connecting to a database

In order to use the extract capability of the Migrator to download element conditions and specifications from a Pontis database, a 'connect string' will be required. Typically, this is the same connect string as the one used by Pontis 5.1 to connect to the database. It is the responsibility of the end user to set up a working OLEDB connect string for their database. ¹¹

A copy of the 5.1 sample database (from Summer 2011) was used for development of the Migrator. That database is a SQL Express database. A standard connect string for SQL Express (assuming it is located in a standard SQL Express data subdirectory in this case) is:

```
-B 'Provider=SQLOLEDB;Data Source=REDBANDTROUT\SQLEXPRESS;Integrated Security=SSPI;Initial Catalog=Pontis51-Sample;Initial File Name="C:\Program Files\Microsoft SQL Server\MSSQL10.SQLEXPRESS\MSSQL\DATA\Pontis51-Sample.mdf"'
```

...where the OLEDB Provider is **SQLOLEDB** from Microsoft, the source in on the workstation **REDBANDTROUT** using **SQLEXPRESS**, the database initial catalog (active database) is **Pontis51-Sample**, and the file name is as shown on the local file system.

Another SQL Express example is:

```
-B 'Provider=SQLOLEDB;Server=.\SQLEXPRESS;Integrated Security=SSPI;Initial Catalog=Pontis51-Sample"'
```

...where the OLEDB Provider is **SQLOLEDB** from Microsoft, the source in on the default workstation using **SQLEXPRESS**, and the database initial catalog (active database) is **Pontis51-Sample**.

An Oracle example is:

```
-B'Provider=MSDAORA;Data Source=XE;User ID=VDOT'
```

...where the OLEDB Provider is MSDAORA provided by Oracle as part of its client software, the data source name **XE** is the Oracle SID of the database, which is typically defined in the workstation's TNSNAMES.ORA file, and the user id VDOT is a Pontis user from the great Commonwealth of Virginia.

There are a wide variety of connect string possibilities that are beyond the scope of this documentation. Using valid Pontis 5. \boldsymbol{x} database connect strings is recommended. The Pontis 5. \boldsymbol{x} application provides a configuration page for creating and testing database connection strings that should be helpful. Once a valid connection string has been created in Pontis 5. \boldsymbol{x} , it can be copied and pasted into the Migrator application settings form.

Use of quotes in connect strings

Note that in the SQL Express example above, the fully qualified file name portion is enclosed in double quotes, so the entire connect string must be enclosed in single quotes. In other situations where the connect string does not have embedded spaces, it can be enclosed in either single or double quotes.

¹¹ Connection string resources and examples at www.connectionstrings.com may be helpful.

Installation Summary

An installation program Setup.exe is provided for the GUI installation. Running this program will install all portions of the GUI, except it does not install the .NET Frameworks or any database vendor OLEDB adapters, which are assumed to be in place and configured beforehand. The setup program is available at https://bridgeware.onjira.com/browse/PEMBETA-61. Run the setup program directly or through the usual Control Panel/Add Programs (Programs and Features for Windows 7).

The prompts are self-explanatory and consistent with any Windows program. The setup program will prompt for a working directory for the application. If the program has never been installed before, this will default to C:\Users\<userid>\AppData\Roaming\AASHTOWare\Bridgeware Element Migrator on Windows 7, and C:\Documents and Settings\<userid>\Application

Data\AASHTOWare\Bridgeware Element Migrator for a WinXP workstation. A reasonable alternate working directory might be C:\AASHTOWare\Visual Element Migrator. Any local directory may be used but it must be a normal writable directory in which users have full privileges to read and write files. During the installation, a working directory structure consisting of the named target and several standard subdirectories such as Input, Output, Logs, and Temp will be created automatically.

The default install location for the program itself is C:\Program Files(x86)\AASHTOWare\Visual Element Migrator 1.1. An alternative program location can be specified during installation. Network install locations have not been tested or certified but may operate properly. No testing has been performed in a Citrix environment. UNC install paths and file name settings are not supported.


In addition to installing the application, a set of runnable sample and default files will be placed in the default directory structure. The various Migrator files are documented in later sections of this manual.

Confirm Installation

To verify that the GUI is installed properly, perform the following sequence:


- 1. Click Start, then locate the program Visual Element Migrator, or click the desktop icon.
- 2. Double-click or open the program
- 3. A splash screen similar to the following will be displayed as the program starts up. It will remain visible while all the data files are loaded and the user interface is launched. The startup process may be slightly slower on first use of the application during a session or after a new installation, as a shadow compiled copy of the software is made by the .NET Framework.

Figure 2 - Startup Splash Screen

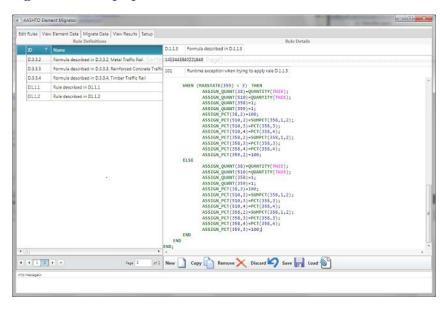


After the program loads you will see a main program window similar to the example shown below. Clicking any row on the list of rule definitions will show the rule syntax.

Figure 3 - GUI Application Opening Screen

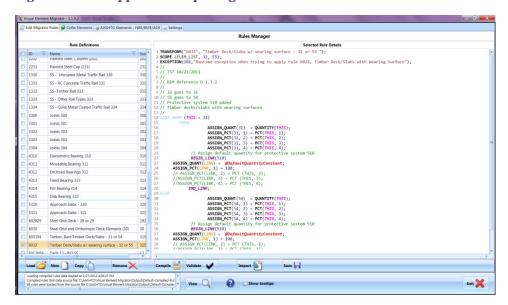

Click on the Settings tab to verify the file locations under the working directory that was specified during installation. A portion of this screen is shown in the next exhibit.

Figure 4 - Snippet of Settings Screen Showing File Locations

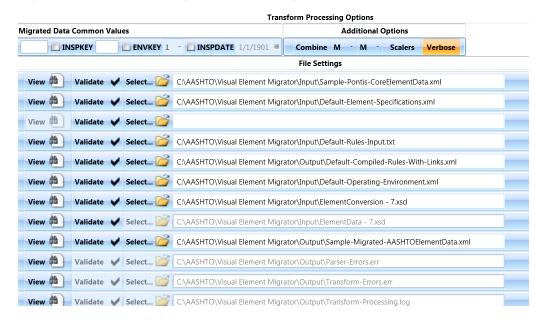

The file locations should reflect the working directory specified during the installation process. This confirms successful installation of the program. In this case the install location in the user's home directory tree is the default for Windows 7 but any user-writable directory is supported.

Upgrades

The Migrator does not provide a built-in software updating capability. Any upgrades will be installed on top of the old version by default. If the installer detects that files from the program exist in the target working directory, it will offer to back these up before uninstalling and reinstalling the application. This is a convenience and does not and cannot guarantee data security. Users are strongly encouraged to back up their working directory contents separately to external media beforehand.

Removing the program

An uninstall program can be found in the program's installation directory or the Control Panel Add/Remove Programs can be used to remove the program. Any files created or modified by the user in the working directory structure may not be successfully removed by the uninstall program and will have to be removed individually after the process completes.

3. Using the Visual Element Migrator

•

User Interface Overview

The desktop is organized into 4 tabs that correspond to each of the major application modules which are described below. To support these, a common set of tools are provided on the desktop for activity monitoring, showing popup tooltips, launching the help system, and exiting the application. The user interface does not use any conventional menus.

The key characteristics are:

- The user interface is the mouse, which performs the select, edit and button functions. As in the command interface, diagnostic and progress messages are printed to the screen or saved to log files.
- The GUI uses separate modules for: 1) writing, editing and compiling rule sets for use in data transformation, 2) importing and manipulating a set of CoRe data for transformation and 3) running a transformation from CoRe to AASHTO data sets.


 These modules are contained in a single set of tab panes accessible by launching the AASHTO Element Migrator program in windows. Each module corresponds to a key aspect of the migration process and is designed to be used in sequence with the other modules.
- All of the GUI Migrator program's behavior is managed through the Settings module, which is
 used to configure all the operating parameters and the files the Migrator uses in performing
 transformations on the dataset.

Desktop tools

There are four tools that are available throughout the application. These are shown in the following figure showing the desktop. The control panel at the bottom of the screen includes:

- The View button displays a log of actions performed in the session. This displays a popup window which permits the user to print, save the messages to a PDF file or to clear the system message history.
- The Help button, with a question mark icon, displays the full help for the application, based on portions of this guide.
- The Show Tooltips checkbox will set the application to show detailed tooltips for user interface elements
- The Exit button will shut down the Migrator. The application can also be closed with the normal Window close button in the upper right corner.

Figure 5 - Migrator Desktop Overview

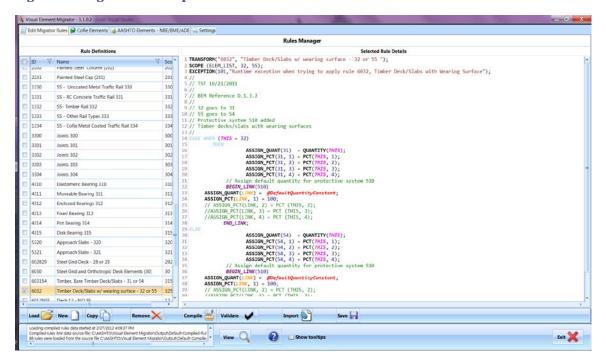


In addition to these icon button controls, pressing F1 will launch the popup tooltip help system providing detailed help for every control on the user interface.

Filtering Data


All grid displays in the user interface display a small filter icon that launches the built in filtering wizard for the grid as shown in the following picture. Clicking on this icon reveals a filter dialog which permits a wide variety of filtering options.

Figure 6 - Filter Tool Icon



The following exhibit shows the filter dialog itself. In this case, the filtering column is the bridge identifier, and the unique values for the field in the grid are all listed as checkboxes. A logical formula can also be entered here. Combinations of columns can be used for filtering.

Figure 7 - Filter Options Dialog



Sorting Data

The grids can be sorted by clicking on the headers, and multiple columns can be combined for sorting by clicking on the column headers while holding down the Shift key. Click the columns repeatedly to toggle the sort order and to clear the sort.


Modules

Module 1 - Edit Migrator Rules

The Edit Migrator Rules module is used to collect and edit the rules for migrating CoRe elements to National Bridge Elements (NBEs), Bridge Management Elements (BMEs) and Agency-Defined Elements (ADEs), as well as generating Defect Flags (SF). The rule definitions can also automatically associate elements and protective systems as well as tag elements with rollup NBE targets, used to consolidate families of related sub-elements e.g. girders and beam ends for national reporting purposes.

The rule screen is split between a text editor used to modify the rules and a set of columns displaying data on the rules themselves. The rules are listed by Rule ID. The text editor allows you to modify any of the set of default rules to fit your needs.

Figure 8 - Rules Editing Screen

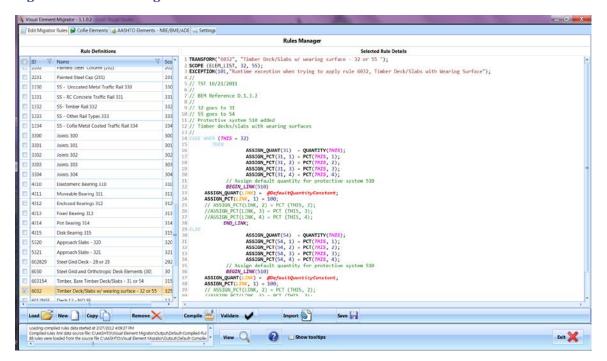

The Rules module lets you quickly switch between multiple compiled rule sets using the Load button, which can incorporate any rules file in xml format as the rules dictating the transformation of CoRe elements. The New and Copy buttons are relatively self-explanatory; Copy requires the selection of a rule, or a range of rules, and the rules will appear with a default name in the column list.

The Remove button takes a rule out of a list. If you don't save at this point, however, the rule will not be eliminated from the dataset. The Save button *by default* will only save those entries selected in the list. Save validates the rule or rules when it runs, and will not complete if the rule set contains errors.

The last two buttons, Validate and Compile, are used to prepare an edited rule set for output as a rules .xml file to be used in the migration process. Validate checks the correctness of the rules according to the syntax laid out in chapter 5 and registers any errors in the file Parser.err (located in the Output subdirectory). Compile generates an .xml file which serves as an input in a later part of the procedure. The compilation process does not generate any output if the rule set doesn't parse and validate correctly.

Editing Rules

Rules can be edited by typing in the right hand column. Certain keywords and directives will automatically be highlighted for readability, but the syntax is not checked dynamically. After a rule body is created, it should be validated using the Validate button and any errors should be corrected. Rules are not saved until the Save button is pressed, however, you can move between rules and copy and paste between them.

Rules can be added with a stub layout by using the New button. These rules have the right layout but do nothing. Typically it is preferable to copy a working rule to a new rule. In that case a new entry will be generated and it will automatically be named and numbered with defaults that should be changed.

Examples of rule bodies generated both ways are shown below. The first example show s a copy of rule 4315 which is identical to the original and would typically be changed to a new ID and a new very similar target element, perhaps an agency-specific type of disk bearing.

Figure 9 - A Copied Rule

```
1 /*Copy of existing rule 4315 - Disk Bearing 315 */
2 TRANSFORM("4315", "Disk Bearing 315 ");
3 SCOPE (ELEM_LIST, 315);
4 EXCEPTION(101, "Runtime exception when trying to apply 5 // TST 10/21/2011 - Checked and Works 6 //
7 // Simple Conversion for all Disk Bearings 8 //
9 // Assumes NO Paint or Protection System 10 // an agency could add this if they need to 11 // - Add 515 Steel Protective Coating (AREA) 12 // - as shown in commented lines 13 CASE
```

The next exhibit shows a starter rule body 'stub' that provides a framework for writing a new rule but will not compile or do anything until revised.

Figure 10 - New Rule Stub

```
1 TRANSFORM( "<RULE ID>","<RULE DESCRIPTION>");
2 SCOPE( ELEM-LIST, <ENTER SCOPE DETAIL>);
3 EXCEPTION( <INTEGER EXCEPTION CODE> ,"<EXCEPTION MESSAGE>");
4 /* Please provide a full description of this rule */
5 <REPLACE WITH RULE STATEMENTS>
```

Rule ID Convention

The convention for identifying rules used in the default set is as follows:

- 1^{st} digit major element category. These are 1 superstructure; 2- substructure; 3 joints; 4-bearings; 5 approach slabs; and 6 decks and slabs. Smart flag rules start with a 7, and agency element rules start with an 8.
- Next few digits the element key, with leading zero for sorting convenience. 6012 would be a bare concreted deck, for example.
- Final characters- an indication of whether Smart Flags are involved in the rule or not, or a tag for a rule variant as appropriate. For example, 'NSF' means does not use smart flags in the rule, while 'SF358SF359' means both smart flags 358 and 359 are considered in the rule, for an element on a bridge where these smart flags are found.

• Using this convention, then, a rule ID 6012SF358SF359 would pertain to deck, type 12, for a bridge with both 358 and 359 smart flags.

Documenting Rules

The example rules shown provide comments throughout. Liberal use of comments is strongly recommended since there are many engineering assumptions intrinsic to these rule bodies which should be communicated to other interested parties in an agency. Comments may be extensive over multiple lines using the /* */ format or follow the one comment per line // format as appropriate. Comment formats are described in the later section on rule syntax.

Module 2 - CoRe Elements Data

This module shows the specific CoRe data to be transformed and includes tools for downloading and migration of the data. No element data editing is provided as that is the responsibility of the source program (typically PontisTM). The screen contains columns for Summary, Total Quantity, State Quantities, Bridge Key, Inspection Date, and other standard element data items. Using the filter function on this screen allows you to sort and sift through the CoRe elements according to any of these criteria. By default, it sorts according to Bridge Key.

This module deals with CoRe elements, and the program defaults to displaying ten elements per page. If you need to deal with the whole dataset, click View to open the entry log for the program, note the number of elements comprising this set and instruct the program to display a higher number per page than exists in the whole of the set. This applies to Module 3- Migrated NBE/BME/ADE Data, as well.

The functions on this page are always dependent on the selection and editing of rules in the previous module. The rules module tells the Migrator exactly what transformations to perform on the CoRe element data. Therefore, make sure to proceed with your migration from leftmost to rightmost module.

The Download button connects to a SQL server to download element data files for import into the Migrator. This button also downloads and generates an operating environment Xml file based on the current Pontis element definitions for use with the Migrator.

Save and Load perform similar functions as in the Edit Rules module- Save creates a .xml file composed of all elements selected when the button is clicked and Load imports such an .xml file into the Migrator. The files are validated as they are imported and no data will be loaded if the files do not pass validation according to the ElementData - 7.xsd schema.¹²

The Migrate List function only affects the highlighted rows, or if no rows are selected, the entire list of data in the grid. Assuming that everything in the Settings module is set correctly (see below), the Migrate List button transforms the selected CoRe elements data set into NBE's, BME's and ABE's according to the rules set in place in the Edit Migrator Rules module. The file format for the migration output is .xml.

Module 3- AASHTO Elements

This module displays the results of migration from CoRe to AASHTO NBE's, BME's, ADE's and DF's. The column structure is identical to that found in Module 2 - CoRe Elements: Summary, Total Quantity, State Quantities, Bridge Key, Inspection Date, Inspection Key, Element Key, Environment and Structure

Validation of xml files against the appropriate schema is automatic. No data can be loaded that does not pass validation. More information about xml file validation is available in any xml guide.

Unit. These columns are augmented with the optional NBE rollup element keys, and, for protective system BME elements, the associated primary structural element.

Migrate a File draws on an existing CoRe elements .xml file to generate a set of NBE elements displayed on the screen.

Save Results and Load Results in this module are mechanically identical to those in the second module, with the exception that the targets are slightly different; The third module is a collection screen designed to give the user the ability to access and manipulate a migrated data set. Therefore, where the second module stored its files as .xml files of migrated data, the third module lets the user get a specific set of data from a larger set. This is technically possible in the second module as well, but the third module uses the same function on the same CoRe dataset to display the new NBE/BME/ADE data. Whereas you see the input files and generate a more specific set on the second module screen, the third module allows for display and manipulation of the output files.

Module 4- Settings

The Settings module manages all the options for modifying the Migrator operating parameters. The top two lines are used to set the connection strings and the where clause (filter) for downloading some or all CoRe Element data from a Pontis database into the Migrator utility. The various checkboxes and input fields on the row below allow for defining a common characteristic for the selected elements. Below that, the file list sets each of the files used by the Migrator GUI as it imports, validates and transforms elements. Some of the file names are fixed and the user cannot change them. All the settings on this page must be saved before the application will use them for processing. Press the Save Settings button near the bottom of the page to apply the choices. File name selections, however, are automatically applied by the file selection dialog.

Migrator Operating Settings Data Extractor Options Fest Connect . Connection String Provider=SQLCLEDE:Server=\SQLEXPRESS:Integrated Security=SSPEInitial Catalog=Pontis51-Sample Cutoff Date 1/1/1901 = WHERE: INSPKEY ENVKEY 1 - INSPDATE 1/1/1901 ELEMENT-SPECS-XML-FV View 1 Validate V Select. 2 C:\AASHTO\Visual Element Migraton\input\Default-Element-Specifications.xm View M Validate V Select. View
Validate V Select. C1/AASHTO\Visual Element Migraton/Input\Default-Rules-Input.txt RULES-INPUT-TXT-FT View

■ Validate

Select.

CAASHTO\Visual Element Migrator\Output\Cefault Compiled Rules With Linkson OPERATING-ENVIRONMENT-FD View 1 Validate V Select. C:\AASHTO\Visual Element Migraton\Input\Default-Operating-Envi View

■ Validate

Select.

C\AASHTO\Visual Element Migrator\Input\ElementConversion - 7.xsd View 🛍 Validate 🗸 Select. 🎬 C:\AASHTO\Visual Element Migrator\Input\ElementData - 7.xs View A Validate Select. C:\AASHTO\Visual Element Micrator\Output\Sample-Migrated-AASHTOElementData.xm OUTPUT-AASHTO-ELEMENTS-FO View 49 Validate 🗸 Select... 🌃 View A Validate V Select TRANSFORM-ERRORS-LOG-FM View

Validate

✓ Select.

CAASHTO\Visual Bernent Migrator View # Validate V Select C:\AASHTO\Visual Element Migrat

Figure 11 - Settings Module Main Screen

Download settings

The first set of functions on the Settings page consists of the Test Connect button, and the Connection String, Cutoff Date and WHERE clause operating options.

Configuring the database connection

In order to connect to a Pontis database and download data, a valid, working connection string must be provided for the application. If only a subset of the core element data is required, a WHERE clause can be entered that will restrict the rows that are downloaded.

Connect String — This field shows the OLEDB string used to connect to an exterior database. These were discussed earlier in Chapter 2. The database connection string is used by the application to connect to a Pontis database using the OLEDB protocol. This connection string should be configured and tested outside of the application, then pasted here. The Migrator application does not itself provide functionality to build connection strings.

Test Connect - Once a connect string has been entered, use the Test Connect button to check the connection before downloading files. This test also will automatically append the contents of the WHERE clause to the download SQL to evaluate its syntax.

Setting the download criteria

The WHERE clause setting filters the downloaded element data. An individual bridge can be specified, for example, or bridges with a particular element type. When the Migrator connects to a database to extract data, it automatically chooses to grab all the existing element condition data unless a WHERE clause is provided that selects a more restricted set of information. The WHERE clause does not need to start with WHERE but must show the full table name for any column that is used in the WHERE clause e.g. BRIDGE_ID='XYZ', not BRIDGE_ID = 'XYZ'. As noted above, the Test Connect button will automatically append the WHERE clause to the SQL and check its syntax.

Cutoff Date specifies the span of years for which the Migrator will collect data. It assumes that the user always wants data up to the present time, so Cutoff Date only specifies a beginning point for retrieval. Using this option permits the user to select data on or after a particular date. This field provides a calendar picker for data entry or the date may be entered directly.

It is important to note that the Cutoff Date and the WHERE clause can be applied separately or in combination. When used in combination, this can lead to unexpected results if the Cutoff Date makes the WHERE clause criteria irrelevant and vice versa. For example if all element condition data is requested for all inspections after a particular date, but the WHERE clause selects specific bridges that do not happen to have any inspections after that date, then no data will be selected and downloaded.

Data recoding settings

The five settings below each force a set of migrated output elements to have the same shared characteristic, which is set using the text input box to the right of each key. These buttons correspond to the flags discussed in the command line operation instructions. None of these special recoding settings are required during normal migration operations.

Checking these boxes and entering a value will force all entries to use that attribute upon migration. For example, all the generated elements can be assigned to one structure unit and can all be associated with a single inspection key for easy reference, if desired. If none of these options are set, then the original characteristics will be preserved during migration.

BRKEY sets a common database key ID for the bridge the migrated element(s) rest(s) on, equivalent to the command line flag -B.

UNIT sets a common value for the superstructure unit to which the element(s) will be assigned, equivalent to command line flag -S.

INSPKEY sets a common inspection ID for the migrated element(s), equivalent to command line flag -I. This may be useful to be able to easily identify the initial migrated element records in the target database. This should only be used if the set of records to be migrated includes just the latest inspection for each bridge or unwanted ambiguity may result.


ENVKEY sets the physical/operational environment for the migrated elements, equivalent to command line flag -E.

INSPDATE sets a common date of inspection for the migrated element(s), equivalent to command line flag -D. This field will show a calendar picker for data entry. This field should likely be used in combination with the INSPKEY setting in most cases.

Additional Options

These settings are related to the source and target data in the migration and logging. These are displayed in the following screen fragment:

Figure 12 - Additional Transformation Options



Data may be submitted for migration in either Metric or English and can be emitted from the Migrator in either Metric or English Units of Measure (UOM). The source and target data may be either percentages or quantities. A dropdown is shown that permits selecting one of these options.

The M | MP | E | EP controls (input and output) determine the units of measure used by the input and output datasets; the metric (M) and English (E) quantity measurements can also be processed as percentages for a condition state (MP, EP). For example, with M selected as an input, the Migrator will assume that it is receiving true measurements, while selecting MP will make the Migrator look for a percentage in a condition state of a total metric quantity. The same applies for English measurements.

All the source data condition state percentages are checked to make sure they add up to 100%. An error will be logged if these data do not add up, but the program will attempt to fix the data on the fly by adding or removing from State 1. Nevertheless, it is not recommended that the data have significant normalization problems when used for migration.

The output UOM can be set as well, performing metric English conversion on the fly during transformation using the standard element conversion factors found in the conversion schema Xsd file. Further, the output can be in either quantities or percentages.

Combine adds elements of the same type together when they occur on multiple structure units for a bridge. This collapses detail but may be appropriate in some cases. This is a true/false toggle button which will be a contrasting color if enabled.

Scaler (-XO/-XI) defaults to maintaining the same scaler for input and output quantities. If the button is pressed, the Migratory will ignore scalers and treat the element as raw data. This is a true/false toggle button which will be a contrasting color if enabled.

Verbose/Terse (-V) refers to the level of detail in the transform processing log. It defaults to verbose descriptions. This is a true/false toggle button which will be a contrasting color if enabled.

Miscellaneous Settings

The Themes button allows the user to change the appearance of the program. It defaults to the typical Microsoft™ Office Blue similar to the default for Microsoft Word™ and after a confirmation dialog, automatically restarts the application to apply the new theme. This button is disabled if there are any pending changes.¹³ Clicking the button pops up a list of available themes with buttons showing the theme effect. The choice of theme is persisted between sessions.

OUTPUT-AASH MS Office Black ۷i PARSER-EF MS Office Blue TRANSFORM: ۷i MS Office Silver TRANSFO ۷i Summer SESSION-I Vi Vista Windows7 **Transparent**

Figure 13 - Theme Selections

Getting help

Press F1 at any time to reveal popup help for the various screens and controls, as well as descriptions of each of the files used. Press the question mark on the bottom of the screen to show the full online help (generated from this manual).


¹³ The Expression Dark and Windows 8 Metro themes are not supported by the application.

Using the grid view

A primary advantage the GUI has over the command line interface is the ability to display and manipulate all of the data in a dataset at once. The GUI uses a columnar structure with the ability to select and filter each column according to specific criteria.

The generic structure of the columns looks like this:

Figure 14 - Standard Data Grid

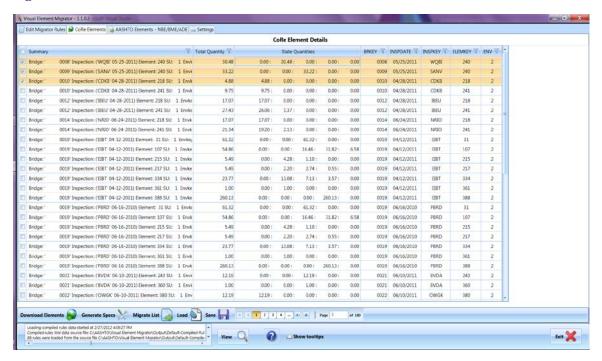

This image is taken from the main screen of the CoRe Elements module. The columns are completely resizable, but default to a standard size upon opening.

Selecting data from the list

The user selects, manipulates, compiles and migrates data based on the selections in this pane, so it's critical to understand how it works. You can only select entries by clicking on them directly, so that the entire row becomes highlighted, or by shift-clicking to select an entire range. Use control-click to select and deselect individual entries. If nothing is selected, then the program assumes all the rows should be processed. If you make selections but do not select an entry so that it's highlighted, then when you click a command button, it will not be included in the set of data to be processed. In the example above, if you were to save this entry as a completely new set of CoRe Elements, only the first 3 lines would be saved to a new set.

If you'd like to select every element in a given set, set the Page Size, which is the number of entries displayed per screen in the grid, to an arbitrarily large number (greater than the number of elements present in your data). Click the checkbox on the left-hand side of the column headings to select every entry on the screen. If you unselect all data rows, the entire set of data is saved by default.

There is typically no need to save multiple copies of the source data as it can be downloaded again at any time from the source Pontis database, but it may be helpful to create small test subsets to use for testing rules against specific element types.

Sorting the data

You can also click the column headings to make the whole set (selected and unselected) sort according to that column. After 3 clicks, it sorts by the left-most column (summary in the example above). Holding down the shift key permits a cumulative sort on multiple columns. The sort direction is indicated by a small twistie in the column heading.

Applying filters to the data

The Migrator utility includes a filter function used to quickly assemble specific sets of data. The menu is accessed by clicking on the small filter icon in the header of each column (see below). This brings up a menu with an itemized list of all the entries in the current list with checkboxes allowing you to include or exclude them in the dataset you want to migrate. Selecting multiple items in the drop down list, or filtering out unwanted entries reduces the active entries that will be processed by the Migrator. If you want to turn them into a usable extract dataset, use the Save button as detailed above after filtering out unwanted elements.

Figure 15 - Filter Tool Icon in Column Header

Rule Definitions		
7	Scope ₹	
eck - 28 or 29	2928	

In addition to individual selection by value, the Migrator filtering tool also provides a number of standard logical filter options.


The logical filters are as follows:

- Is equal to
- Is not equal to
- Starts with
- Ends with
- Contains
- Does not contain
- Is contained in
- Is not contained in

In addition to these logical operators, the filters can be set with both entry fields as well as an 'and/or' clause. In a complicated situation, you can have multiple criteria including both directly selected data values and logical filters at work on a single set of data.

If, in the Edit Migrator Rules module, you want to see all rules pertaining to deck and slab elements, which by Pontis convention have an ID starting with the number 6, enter the following into the summary column:

Figure 16 – Filter Rules by First Digit of Rule ID

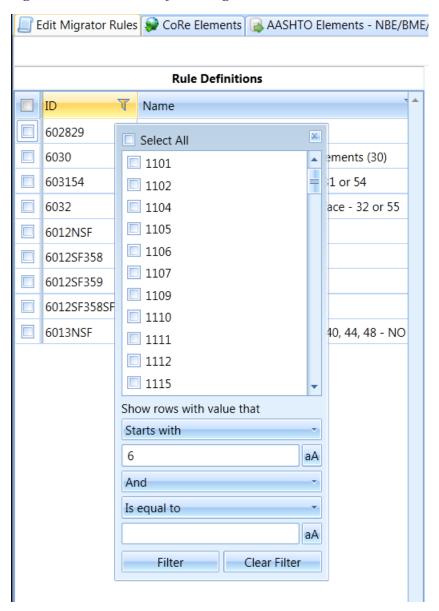

The grid then displays all the entries beginning with a '6', which is the decks and slabs category.

If you want to filter out everything with a name that doesn't contain concrete or timber, enter the following into the second column:

Concrete-Reinforced Concrete Cap 234 1106 Unpainted Steel Open Girder (106) Concrete-Reinforced Concrete Column 205 1112 Unpainted Steel Stringer (112) Concrete-Reinforced Concrete Culvert 241 1120 Unpainted Steel Thru Truss Bottom Chord (120) Concrete-Reinforced Concrete Floor Beam 155 1130 Unpainted Steel Deck Truss (130) Concrete-Reinforced Concrete Open Girder 110 1140 Unpainted Steel (140) Only Concrete-Reinforced Concrete Pier Wall210 1151 Unpainted Steel Floor Beam (151) Only Show rows with value that 1160 Unpainted Steel Pin and Hanger Assembly (160) Does not contain Timber aA 2201 Unpainted Steel Column (201) 2225 Unpainted Steel Submerged Pile (225) And 2230 Unpainted Steel Cap (230) Does not contain 2240 Steel Culvert (240) aA Concrete 1102 Painted Steel Box Girder (102) Filter Clear Filter 1107 Painted Steel Open Girder (107) 1121 Painted Steel Thru Truss Bottom Chord (121) 1131 Painted Steel Deck Truss (131) 1141 Painted Steel Arch (141) 1150 Dainted Chaol Floor Boom (152)

Figure 17 - Filter Rules to Exclude Materials

It is possible to filter each column according to specific, separate parameters.

Filters are not reapplied upon reopening the program.

Clearing filters

The filters will not reset unless you either close the program or click "Clear Filter" from the filter popup menu

4. Conversion Rule Guide

Background

The 2011 first edition of the AASHTO Guide Manual for Bridge Element Inspection (the '*BEM*') included a technical Appendix D with transformation rules for CoRe elements expressed in graphical and outline terms. The Migrator was designed provide a means to embed this rule logic in its element data migration processing in a configurable manner. To that end a comprehensive rule language has been defined which is used to express the conversion logic. A full set of tested rules for every AASHTO CoRe element is provided with the software.

The rules have a **source scope**, meaning that they may apply to one element, several elements, a type of elements, or an element category, taken in *reverse* hierarchical order from a rule for an individual element down to a rule for a category (list). This flexibility of scope permits fewer rules to transform more elements.

The rules also incorporate the effects of Smart Flags when applicable and encountered in the incoming condition data. Some elements are affected by Smart Flags, such as decks which may be influenced by the soffit and deck cracking flags, and others are not. For the 'no-Smart-Flag-influence' situation, the transformations are relatively straightforward mappings of old and new condition states. For the situation where smart flags apply, their existence on a bridge must be considered during conversion and embedded in the logic. In the new specification Smart Flags are now termed Defect Flags.

Special functions are used to associate elements with other elements and Smart Flags either on the same structure anywhere, or on the same user-defined unit of the structure (e.g., structural frame).

It is also possible to associate protective system bridge management elements with any inventory element on the fly, and to create a rollup linkage for any element to collapse the condition distribution for BME's and ADE's to National Bridge Elements for Federal reporting purposes or cross-comparisons between States.

The rules for element conversion in the Migrator follow the approach of Appendix D of the original BEM document. The rules were developed from the examples in that appendix originally and have been significantly refined and improved during the course of the development of the Migrator. The Migrator includes a full set of rules for every standard Pontis CoRe element with variations considering the influence of Smart Flags or the existence of other elements on the structure

Rule Syntax

Typical conversion rule logic for each is shown in the following 3 figures.

Syntax for a Simple Element Migration Transform Formula

The figure below¹⁸ shows the simple case of state to state assignment for element 104 without consideration of smart flags. This just requires deciding which source states map to which target states and in what percentages or sums over source percentage. The example source code is what the end user would enter as a formula, which is then parsed, validated, and stored in tokenized form in an Xml file for use in migration processing.

All examples shown here are taken from the file Default-Rules-Input.txt distributed with the Migrator

Figure 18 - - Migration Rule Source Example - Prestressed Concrete Box Girder (104)

```
TRANSFORM("1104", "PS Concrete Box Girder (104)");
SCOPE (ELEM_LIST, 104);
EXCEPTION(101, "Runtime exception when trying to apply rule 1104, PS Conc Box Girder (104)");
// -----
// Update History:
// Version 1.1 - March 30, 2012
// -----
// Commentary
// -----
//RAE - 7/21/11 - checked
// TST 9/27/2011 - Checked and Works
// BEM Reference D.2.2.1a
//
CASE
WHEN (1) THEN
      ASSIGN_QUANT(THIS) = QUANTITY(THIS);
      ASSIGN_PCT(THIS, 1) = PCT(THIS, 1);
      ASSIGN_PCT(THIS, 2) = PCT(THIS, 2);
      ASSIGN_PCT(THIS, 3) = PCT(THIS, 3);
      ASSIGN_PCT(THIS, 4) = PCT(THIS, 4);
END;
// if commonly spalled in State 1, this alternate transformation model can be used to downgrade State 1
// direct assignment of target state 1=0 shown for clarity - not required
//CASE
//WHEN (1) THEN
//ASSIGN_PCT(THIS, 1) =0;
//ASSIGN_PCT(THIS, 2) =SUMPCT(THIS, 1,2);
//ASSIGN_PCT(THIS, 3) = PCT(THIS, 3);
//ASSIGN_PCT(THIS, 4) = PCT(THIS, 4);
// END;
```

Syntax for a Formula Using Smart Flags

The next figure outlines the more complicate case of an NBE deck type 12 with no asphaltic wearing surface and smart flags 358 (deck cracking)

Figure 19 - Migration Rule Source Example - Deck 12 with Smart Flag 358

```
TRANSFORM("6012+SF358", "Decks/Slabs 12 - SF 358 only - No Wearing Surface and/or Protection System(s)");
SCOPE (ELEM LIST, 12);
EXCEPTION(101, "Runtime exception when trying to apply rule 6012+SF358");
// -----
// Update History:
// Version 1.1 - March 30, 2012
// Version 1.2 - June 27. 2012
// -----
// Commentary
// ------
// All 3 of these CoRe deck elements become a type 12 in the new specification (consolidated)
// Decks/Slab elements 12 all go to AASHTO 12
// None of these elements have wearing surfaces
//
// Handles case when 358 exists but not 359
// Core 358 was 4 CS
// AASHTO 358 is 4 CS
// Add Deck Protection System where applicable
//
//
// 12/08/2011 - Ready for Review
//
//
CASE WHEN (EXISTS(358) AND NOT EXISTS(359))
   THEN
// ARMarshall
// Applies to all the elements in the SCOPE, so just use 1 for true here
// CASE WHEN (THIS=12)
     CASE WHEN (1)
      THEN
//
                                ASSIGN_QUANT(12) = QUANTITY(THIS);
                                ASSIGN_PCT(12, 3) = PCT(358, 4);
                                ASSIGN_PCT(12, 2) = SUMPCT(358, 1, 3);
//
      BEGIN LINK(358)
      ASSIGN_QUANT(LINK) = QUANTITY(THIS) ;
                                                                          ASSIGN PCT(LINK, 3) =
PCT(358, 4);
      ASSIGN_PCT(LINK, 2) = SUMPCT(358, 1, 3);
//
       END_LINK;
//
      END
END;
```

Syntax for a Complicated Multi-Element Transform Formula

The final example shows a complicated case of a multipath migration rule CoRe element deck type (13) with an asphaltic wearing surface and the deck Smart Flags (358,359). In this transform formula, the wearing surface is logically split from the source element and becomes a BME element 510 while the deck itself becomes NBE element (13). This example just shows the processing for one condition state of the element.

Figure 20 - Appendix D, Example 3 - Multipath Example (partial)

```
TRANSFORM( "6012+SF358SF359", "Decks/Slabs 12 with both SF 358 and 359 - No Wearing Surface and/or
Protection System(s)");
SCOPE (ELEM LIST, 12);
EXCEPTION(101, "Runtime exception when trying to apply rule 6012+SF358SF359");
// -----
// Commentary
// -----
// All 3 of these CoRe deck elements become a type 12 in the new specification (consolidated)
// Decks/Slab elements 12 all go to AASHTO 12
// Both Smart Flags are found along with the deck element
// Smart Flag - CS 358 in CS 1
CASE
  WHEN (EXISTS(359) AND EXISTS(358)) THEN
  CASE
     WHEN (PCT(358, 1) = 100) THEN
     CASE
//
        WHEN (PCT(359, 1) = 100) THEN
          ASSIGN_QUANT(12) = QUANTITY(THIS);
// 358 controls so all of deck goes to CS 2
// 358 will go to CS 2
// 359 place holder Quantity of 1 to CS 2
         ASSIGN_PCT(12, 2) = 100;
              BEGIN_LINK(358)
              ASSIGN_QUANT(LINK) = QUANTITY(THIS);
              ASSIGN PCT(LINK, 2) = 100;
              END_LINK;
// Quantity 1 (1 sq meter in this case)
              BEGIN_LINK(359)
              ASSIGN_QUANT(LINK) = 1;
              ASSIGN_PCT(LINK, 2) = 100;
              END LINK;
        WHEN (PCT(359, 2) = 100) THEN
         ASSIGN_QUANT(12) = QUANTITY(THIS);
// 358 controls so all of deck goes to CS 2
// 358 will go to CS 2
// 359 place holder Quantity of 1 to CS 2
         ASSIGN_PCT(12, 2) = 100;
              BEGIN LINK(358)
              ASSIGN_QUANT(LINK) = QUANTITY(THIS);
              ASSIGN_PCT(LINK, 2) = 100;
              END_LINK;
// Quantity 1 (1 sq meter in this case)
              BEGIN LINK(359)
              ASSIGN_QUANT(LINK) = 1;
              ASSIGN_PCT(LINK, 2) = 100;
               END_LINK;
```

From these examples of increasing complexity, the ability to handle different conversion logic with the formula language is demonstrated. In the most elementary example, assignments are made 1:1 between states in the old specification and the new. In the most complicated example, a decision tree is followed which recognizes the existence of smart flags to adjust the assignments, and even to generate a new element dynamically when a particular smart flag is in place. A new element will also be generated when the current CoRe element specification incorporates a protective system which is separated out in the new specification.

Protective System Syntax

As noted above, the protective system element for any structural element can be generated 'on the fly' as part of the rule processing. To accomplish this, a special clause is supported in each rule called a BEGIN_LINK/END_LINK clause. A rule including this clause is shown below.

Figure 21 - Automatic Generation of Associated Protective System

```
TRANSFORM("1101", "Unpainted Steel Box Girder (101)");
SCOPE (ELEM LIST, 101);
EXCEPTION(101, "Runtime exception when trying to apply rule 1101, Unpnt Stl Box Girder ");
// TST - 10/19/2011 -
//
// No Smart Flags
//
// BEM Reference D.2.1.3a
// CoRe Element 101 becomes AASHTO element 102 after conversion
// Adds 515 - Prot Coating - Assumes Weathering Steel Protection
//
// 515 Quantity is a default value - must be field verified//
// Inspectors will need to convert to AREA
//
//
CASE
WHEN (1) THEN
             ASSIGN_QUANT(102) = QUANTITY(THIS);
             ASSIGN_PCT(102, 1) = PCT(THIS, 1);
             ASSIGN_PCT(102, 2) = PCT (THIS, 2);
             ASSIGN_PCT(102, 3) = PCT (THIS, 3);
             ASSIGN_PCT(102, 4) = PCT (THIS, 4);
           // assign default value for protective system 515
           BEGIN_LINK(515)
                ASSIGN_QUANT(LINK) = @DefaultQuantityConstant ;
                ASSIGN PCT(LINK, 1) = 100;
               // ASSIGN_PCT(LINK, 2) = PCT (THIS, 2);
               //ASSIGN_PCT(LINK, 3) = PCT (THIS, 3);
               //ASSIGN_PCT(LINK, 4) = PCT (THIS, 4);
            END_LINK;
END;
```

In this example, the source unpainted steel box girder element (CoRe element 101) will be transformed to a type 102 AASHTO unpainted steel box girder with an associated 515 protective system, which is in this case is the weathering steel system. This will only occur if the source element rule includes this

BEGIN_LINK clause and is of the appropriate type as indicated. With this mechanism, the protective rating elements are automatically available in the latest format for use with Pontis 5.1.2 and can be rated by the inspector during the next visit. As shown in this example, the amount of weathering steel is set to a default quantity in condition state 1, so the distribution of condition of the weathering system must be confirmed by subsequent field observation and measurement.

Rollup Rules

The new AASHTO specification distinguishes between National Bridge Elements (NBEs), Bridge Management Elements (BMEs) and Agency-Defined Elements (ADEs) and also supports Defect Flags (DF) as the successor to Smart Flags. The BEM provides for the possibility that any NBE may be the result of consolidating the condition assessments of all the BMEs and ADEs that are related to it - for example, the beam ends are a BME which related to the girder as a whole- and that 'roll-up' logic may be required during data processing to report NBE quantities and condition state distributions. To support this, the NBE element ID must be related to the BME/ADE element. The Migrator rule language provides a 'ROLLUP' rule that can be used with any 'child' element to determine its NBE 'parent'. The target NBE and the source BME/ADE element or elements appear in the ROLLUP statement. The format rollup rule syntax is as follows:

Figure 22 - Rollup Rule Syntax

```
ROLLUP-RULE-BODY:
    [ EXCEPTION ( <error number> [, <double-quoted error message>] ); ]
    { ROLLUP-DIRECTIVE [ ROLLUP-DIRECTIVE]... }

ROLLUP-DIRECTIVE:
    ROLLUP(<NBE element number> , ELEM-LIST-SCOPE);
```

No rollup rules are provided with the default set of rules.

Understanding Rule Processing Behavior

Rule processing is sequential and operates essentially on one element condition data row at a time, while considering if there are associated elements on the same bridge. The key processing behaviors to recognize are that there are multiple dependent rule chains for elements, no consideration of element condition history, and that structural element associations e.g. presumed interactions must be specified in the incoming data to affect the migration logic.

Rule Chaining

Any 1 rule may not be able to address all the logical possibilities for converting a particular element. In fact, for easier comprehension and maintenance, it is preferable to split the rules for an element by complexity. The Migrator will determine the rule set for a particular element in advance and then traverse the set of rules until an appropriate rule is found. This means that an element with associated smart flags may be processed by a 'later' rule than one that does not have smart flags. This should be considered when defining new rules both to simplify the logic of any one rule and to ensure that all possible paths or combinations are covered by a rule.

Combining Duplicate Elements

If the same element appears more than once on a bridge in the input data, the program can be configured to combine the element in the output data into one new element record, with the quantity and state

distributions reflecting the total. This is the default behavior. Using the -M flag in transform mode, the Migrator can be configured to preserve the multiple element instances in the output data. It should be noted that the Pontis database does not permit the same element to appear more than once on the same structure unit of a bridge so this combinatorial behavior corrects referential integrity issues automatically in the default mode.

Deprecating Elements

A number of elements that exist in the CoRe specification are now deprecated. The rule processing accounts for this because it is driven not just by the input elements allowed but the targets as well, as defined in the element specification configuration file. If an element exists in CoRe but is non-existent in the new AASHTO elements, no rule can have that element as a target for output or an error will be generated.

Transferring Custom Element Specifications

The new AASHTO element numbers were selected without consideration of individual State element numbering systems used with Pontis. It is therefore possible and even likely that a standard AASHTO element ID conflicts with a State ID for an agency defined element. This situation can be easily overcome by small changes to the element definitions table ELEMDEFS in Pontis 4/5.x, which will automatically generate new renumbered element specifications for agency elements as part of the Migrator's download process. The source element data does not have to be changed at all — only the Notes column of the element definition (editable in the Pontis 4x configuration module).

In order to indicate that a particular agency element should be redefined in the Migrator element specifications (renumbered), the element definition Notes column must be edited similar to the following examples²¹:

Table 1 - Automating AASHTO Element Generation for Agency Elements

Elei	Element Definition Coding For Automated AASHTO Element Generation				
Elemkey	Short Name	Notes			
12	Bare Concrete Deck	This element defines those concrete bridge decks with no surface protection of any type {AASHTO: 601,DF;602,DF;603 } {AASHTO: 604;605;606 ; 600} and constructed			
13	Unp Conc Deck/AC Ovl	This element defines those concrete bridge decks with no surface protection of any type. {AASHTO: 602; 603; 600 } The deck			
140	Unpainted StI Arch	This element defines all members of only those steel arches that are not painted or are {AASHTO: 605} constructed			
216	Timber Abutment	This element defines only those abutments constructed {AASHTO: 605} of timber			
356	Steel Fatigue Smart Flag	This flag exists only on those bridges with steel elements which are already showing fatigue damage. {AASHTO: 7356,DF}			

²¹ this is just a partial list of AASHTO elements

_

Ele	Element Definition Coding For Automated AASHTO Element Generation				
Elemkey	Short Name	Notes			
357	Pack Rust Smart Flag	This flag defines only those connections (including shapes in contact in built-up members) of steel {AASHTO: 7357,DF}			
358	Deck Cracking Smart Flag	This condition state language addresses deck cracking. Once a deck begins to show other distress {AASHTO: 7358,DF}			
359	Soffit Smart Flag	This condition state language addresses deck distresses through visual inspections of the deck soffit {AASHTO: 7359,DF}			
360	Settlement Smart Flag	This condition state language addresses substructure settlement distresses which are evident during {AASHTO: 7360,DF}			
361	Scour Smart Flag	This condition state language addresses scour distresses which are evident during visual inspections {AASHTO: 7361,DF}			
362	Traf Impact SmFlag	This condition state language addresses distress of any elements (mainly superstructure) due to {AASHTO: 7362,DF}			
363	Section Loss Smart Flag	This condition state language addresses section loss in areas of steel members which warrant {AASHTO: 7363,DF}			
364	Bridge Rail Smart Flag	This condition state language addresses damage to bridge railing and approach railing {AASHTO: 7364,DF}			
510	Custom R/C Diaphragm	This element defines only those reinforced concrete diaphragm units constructed of reinforced conc and integral with P/S girders. Measured in lineal feet between girders {AASHTO: 8510,ADE}			
515	Custom R/C Wing Wall	This element defines only those wing walls constructed of reinforced concrete {AASHTO: 8515, ADE}			

In these examples, the directives within curly braces notify the Generate Specifications download tool that a custom element definition needs to be generated on the fly. For example, for agency custom element 515, Custom R/C Wingwall, the download process will create an AASHTO element definition 8515 of type ADE. This categorizes the element as an agency element (category 8) and preserves the original agency number 515. In this way, if an agency's element number conflicts with the new specification, there is no need to fix all the source data to overcome the conflict. A rule simply transfers all the 515 source data to the 8515 target data and performs the renumbering automatically.

It is also possible to direct the download process to create a target element for a set of elements, which presumes that element consolidation is planned, where several related and semantically consistent elements will all end up as the single target element. In the above examples, some of the download

directives share targets. Deck 12 for example will generate a 605 element definition, as will 140 and 216²². The presumption is that 12, 140 and 216 will all transfer data to this target 605 through a rule, collapsing 3 current elements to 1. Agencies that have generated a large number of highly interrelated elements with the same units of measure and condition state semantics can take advantage of this mechanism to consolidate and simplify their inventory during transformation.

The following fragment of xml from the file Default- Operating-Environment.xml shows the outcome of these directives:

Figure 23- Fragment of Generated AASHTO Element Specifications

With judicious use of these download directives, it is not necessary to figure out the intricacies of the various xml files used during transform processing, other than possibly entering a reasonable element name and description with a text editor, since default values are supplied during download that are less than informative. It may also be necessary to adjust the material type and the metric/English conversion paircode.

Historical Scope

The element data that is processed by the converter is blind to history by default. This means that if an element used to be associated with a smart flag in the past, but the smart flag has now been removed, the influence of that smart flag on conversion is also removed. The same logic obtains for an associated element that in the conversion process would normally influence condition state assignments. In order to recognize that a smart flag was in effect for a bridge previously, the latest inspection data provided as input to the Migrator must include that smart flag or associated element. Similarly, the Migrator ignores the possibility that an element's condition may improve or deteriorate further as an outcome of a subsequent inspection. The Migrator also does not consider that the source element itself may have been removed on a subsequent inspection in the historical chronology.

Structural Scope

Elements are only influenced by smart flags or associated elements that are co-located with them. If a set of bridge elements for several structure units are encountered, only those where the related elements/flags are on the same unit, regardless of whether it is a physical frame or just an operative association, will follow a conversion path where the associations matter. The Combine option discussed earlier will add these elements together on a single (synthetic) structure unit on the fly if this is required.

The reader may wish to suspend any engineering reality checks at this point. Clearly, the element specification download directives do not substitute for reasonable judgment.

5. Rule Grammar and Syntax

The conversion rules discussed in the prior chapter are expressed in a formal language with syntax and grammar that is analogous to, but different from, Excel macros or Visual Basic/C#. The Migrator language is entered in text format through the user interface or directly in a text file with a text editor such as NotePadTM. The raw text rules file is compiled by the rule compilation tool, and the resulting compiled rules xml file is used by the model layer into executable transformation routines that perform the element data processing.

The basic sequence for rule generation is:

- Create a rule for an individual element in text format, either with a text editor or through the user interface
- · Validate it, and correct any errors
- Compile it
- Use the rule in the Transform process to migrate just that element and review results. Adjust rule as necessary.
- · Assemble individual rules after testing into a comprehensive rule set
- · Transform all elements using the combined rule set

The Migrator language

Any computer language has conventions and standards that have to be followed for mutual comprehension. The Migrator language consists of the following main elements:

- Commands (directives)
- Control Structures
- Logical Control Conditions
- Functions
- Constants
- Arithmetic Operators

- Logical Operators
- Condition State Set Operators
- Assignments
- Comments
- Statement Terminator

These grammar elements are used in the formal rule syntax to perform the data conversion required as described in the previous section. This section documents these language elements first at an abstract summary level then with tangible examples of well-formed rules utilizing each element identified above. Rules may either be single statements or sets of statements making up a rule.

The general layout of a rule statement is as follows (see Figure 27 for a simple example):

Figure 24 - Generalized Transform Rule Layout

```
TRANSFORM( "rule ID");
SCOPE (ELEM-LIST, nn ,nn ,nn ,nn);
EXCEPTION (nnn, "message");
/* extended comments
running over
more than one line
can appear anywhere*/
// A comment of this type can appear on a line by itself.
CASE
       Logical evaluations
                             // in-line comments
               {Match?}
                      {ASSIGN_QUANT...};
                                             // in-line comments
          BEGIN_LINK(element_target)
              {ASSIGN_QUANT...};
                                     // in-line comments
          END_LINK;
END;
```

Any of the following Migrator language elements may appear in a transform rule within this general organization. The *CASE ... END* logical construct, with nesting is the backbone of each formula. *At least 1* CASE ... END *pair is required for each rule.*

In the case of Rollup rules, only the ROLLUP directive appears in the rule body.

Figure 25 - Example Rollup Rule

```
TRANSFORM( "rule ID", "rule description");

EXCEPTION (nnn, "message");

ROLLUP(<NBE element number>, ELEM-LIST-SCOPE);
```

Rule Syntax Reference

This section is adapted directly from the file Conversion Rules Grammar 11 that can be found on the distribution media in the References\Docs subdirectory or under the working directory specified when the Migrator is installed. All the detailed discussion in this chapter is based on this syntax summary.²³

²³ Syntax discussion is current as of version 1.1

How to read this reference

The syntax description that follows uses the following conventions for the formatting of syntax elements:

Figure 26 - How-to Read the Migrator Rules Grammar - Syntax and Notation

```
UPPERCASE ITALIC
                         grammar elements/constructs
UPPERCASE BOLD
                         keywords
(),;
                         parentheses, commas and semicolons are part of the language
{}
                         curly braces are used to scope sequences or choices
[]
                         square brackets embed optional constructs
                         angle brackets are used to embed self-explanatory descriptions of meta-
< >
                         elements
                         vertical bars separate choices between grammar constructs
                         ellipsis indicates that the previous construction may repeat one or more
                         times
// or /* */
                         inline (//) or multiline (/* text */) comments
```

```
Syntax Constructs
RULE:
       TRANSFORM ("<unique rule ID, up to 32 characters>", "<rule description, up to 255 characters>");
       {
               MIGRATION-RULE-BODY
               ROLLUP-RULE-BODY
       }
MIGRATION-RULE-BODY:
       SCOPE ( {ELEMENT-SCOPE|ELEM-TYPE-SCOPE|ELEM-CAT-SCOPE|ELEM-LIST-SCOPE}) ;
       [ EXCEPTION ( <error number> [, <double-quoted error message>] ); ]
       CASE-STATEMENT [;]
ROLLUP-RULE-BODY:
       [ EXCEPTION ( <error number> [, <double-quoted error message>] ); ]
       { ROLLUP-DIRECTIVE [ ROLLUP-DIRECTIVE]... }
ROLLUP-DIRECTIVE:
       ROLLUP(<NBE element number> , ELEM-LIST-SCOPE);
ELEMENT-SCOPE:
       ELEMENT, <element number>
ELEM-TYPE-SCOPE:
       ELEM_TYPE , <element type code>
ELEM-CAT-SCOPE:
       ELEM_CAT, <element category code>
FLFM-LIST-SCOPF:
```

ELEM_LIST , <element number> [, <element number>]...

```
CASE-STATEMENT:
        CASE
                WHEN-THEN-PAIR ...
               [ ELSE { ASSIGNMENT-GROUP | CASE-STATEMENT } ]
        FND
WHEN-THEN-PAIR:
        WHEN ( EXPRESSION ) THEN { ASSIGNMENT-GROUP | CASE-STATEMENT }
LINK-ASSIGNMENT:
        {
               ASSIGN_QUANT (LINK) = EXPRESSION;
               ASSIGN_PCT (LINK, <state-number>) = EXPRESSION;
        }
LINK-ASSIGNMENT-BLOCK:
        {
                BEGIN_LINK ( <element number> [,<element number>]...)
                        { LINK-ASSIGNMENT [ LINK_ASSIGNMENT ] ... }
                END_LINK;
        }
/* Optionally any regular assignment statement may be followed by one or more link assignment blocks */
ASSIGNMENT:
        {
                ASSIGN_QUANT (ELEMENT-TARGET) = EXPRESSION;
                [LINK-ASSIGNMENT-BLOCK [ LINK-ASSIGNMENT-BLOCK ] ...]
                ASSIGN_PCT ( ELEMENT-TARGET , <state-number> ) = EXPRESSION ;
                [LINK-ASSIGNMENT-BLOCK [ LINK-ASSIGNMENT-BLOCK ]...]
        }
ASSIGNMENT-GROUP:
        { ASSIGNMENT [ ASSIGNMENT ]... }
        /* Notice that one can do assignments to more than one element, e.g. a NBE and as smart flag within the
        same group. Link assignment blocks must be preceded by at least one regular assignment directive
        within the assignment group. Elements generated within the link assignment blocks are getting "linked-
        to" attributes that contain numbers of the preceding target elements.*/
ELEMENT-TARGET:
        { <element number> | THIS }
        /* Keyword THIS is used as a reference to the number of the element being currently processed */
EXPRESSION:
               {
                        NUMERIC CONSTANT
                         VARIABLE
                         FUNCTION
                         SPECIAL FUNCTION
```

```
UNARY EXPRESSION
                          BINARY EXPRESSION
                          IF-THEN-ELSE EXPRESSION
        /* Expressions may contain parentheses with unlimited nesting levels although finding errors is more
        difficult with overly complicated nesting */
CONSTANT:
        <any real number>
VARIABLE:
        <identifier starting with a '@', e.g. @var, associated with a numeric value in the ENVIRONMENT-
        VARIABLES section of the formulas XML document. Besides the @ character, identifiers may include upper
        and lower-case letters and numbers from 0 to 9. The total length of identifier may not exceed 32
        characters. >
FUNCTION:
        {
                ISNULL ( EXPRESSION )
                ROUND ( EXPRESSION )
                TRUNC ( EXRESSION )
                ABS (EXPRESSION)
                RANDOM ( EXPRESSION )
                NUMERIC ( EXPRESSION )
                EXP ( EXPRESSION )
                LOG ( EXPRESSION )
                SQRT ( EXPRESSION )
        }
SPECIAL FUNCTION:
        {
                MAXSTATE ( ELEMENT-TARGET )
                EXISTS ( <element number> )
                EXISTS_S ( <element number> )
                EXISTS_U( <element number> )
                QUANTITY ( ELEMENT-TARGET )
                PCT ( ELEMENT-TARGET , <state number> )
                PCTSUM ( ELEMENT-TARGET , <from state number> , <to state number> )
                SCALE_FACTOR( ELEMENT-TARGET )
        }
UNARY EXPRESSION:
                UNARY-SIGN EXPRESSION
```

37

```
BINARY EXPRESSION:

EXPRESSION BINARY-SIGN EXPRESSION

IF-THEN-ELSE EXPRESSION:

IF EXPRESSION THEN EXPRESSION ELSE EXPRESSION

UNARY-SIGN:

{ - | NOT }

BINARY-SIGN:

{ - | + | / | * | % | AND | OR | = | <> | <= | < | >= | > }
```

Syntax Details

Directives

There are 4 major defined commands or directives that start each rule:

TRANSFORM Directive

This **mandatory** directive names and identifies the particular rule. Rule names should be developed carefully to clearly identify what transformations they perform and to what elements.

This directive can be generalized as:

```
TRANSFORM ("Unique Rule ID, up to 32 characters", "<unique rule name, up to 255 characters");
```

SCOPF Directive

This **mandatory** directive determines what **source** CoRe element set is to be processed by a rule. The scope can be a single element, multiple elements, a type of element, a category of elements, or lists of any of these.

The directive is generalized as:

```
SCOPE ( {ELEMENT-SCOPE | ELEM-TYPE-SCOPE | ELEM-CAT-SCOPE | ELEM-LIST-SCOPE} );
```

Only one such *SCOPE* statement may appear in a rule, and different options <u>cannot</u> be combined within a single rule. The individual *SCOPE* directive options are:

```
ELEMENT-SCOPE:
    ELEMENT (< single element number>)

ELEM-TYPE-SCOPE:
    ELEM-TYPE (<element type codes>)

ELEM-CAT-SCOPE:
    ELEM-CAT (<element category codes>)

ELEM-LIST-SCOPE:
    ELEM-LIST (<element number> [ , <element number>]... )
```

The types and category scope options use the standard element types and categories defined for the Pontis bridge management system, and reflected in Tables 2.1 and 2.2 of the BEM. This means, for example that all joints, which are all the same type and are simple in nature anyway, may be dealt with by just one rule.

All values for these options must be delimited with commas.

EXCEPTION Directive

This directive is entirely optional. The EXCEPTION directive is used to indicate that a rule had an unexpected outcome. It halts processing and is recorded in the log as an error with the number and the optional message. The error numbers and messages are agency-defined.

EXCEPTION (integer error number, "<double quoted optional message>");

ROLLUP Directive

Rollup statements are used to indicate that a particular element's quantity and state distribution should be rolled up (added together) to generate an NBE element for (national) reporting purposes. For example, arbitrary element 5678(a sub-portion of the deck specific to a particular State definition) might rollup to element 12 (NBE deck). The elements are assumed to be consistently measured and logically associated, but the Migrator software does not enforce any reasonableness checks.

Use of this directive is entirely optional.

```
ROLLUP(element_target, element scope);
```

Control Structures

There are two main logical control structure provided within the Migrator language — *CASE* statements and *BEGIN_LINK(element_target) / END_LINK* clauses. The *CASE* statement control structure provides for branching alternative calculations within each rule, based upon conditions that evaluate to TRUE or FALSE. There is no inherent limit to the number of alternatives in a *CASE* statement. The first case statement alternative that is evaluated as TRUE is the only one that will be executed and all subsequent alternatives are skipped. The Migrator language also mandates an *ELSE* clause which is applied if all the other '*CASEs*' fail, or an exception may be raised.

The other control structure is the *BEGIN_LINK / END_LINK* clause. This is used to generate associated protective systems for elements as part of the rule. Within the *BEGIN_LINK(element_target) /END_LINK* clause the standard assignment statements and *CASE* clauses may appear. The special keyword *LINK* can also appear in this clause and refers to the element target of the *BEGIN_LINK(element_target)/END_LINK*

CASE Statement Syntax

Generalized, the Migrator's CASE control statement is:

```
CASE
WHEN { CONDITION}
THEN {ASSIGNMENT-GROUP | CASE-STATEMENT}
...
[ELSE {ASSIGNMENT-GROUP | CASE-STATEMENT}]
END
```

These structures may be nested. For example:

```
CASE
WHEN { CONDITION}
THEN {ASSIGNMENT-GROUP | CASE-STATEMENT}
...
CASE
WHEN { CONDITION}
THEN {ASSIGNMENT-GROUP | CASE-STATEMENT}
...
[ELSE {ASSIGNMENT-GROUP | CASE-STATEMENT}]
END>
[ELSE {ASSIGNMENT-GROUP | CASE-STATEMENT}]
END
```

This *CASE* control structure permits each element to have a variety of processing expressions applied to its condition distribution, such as the influence of smart flags by individual condition state, if a smart flag is in effect for the element (e.g. the smart flag was set during the inspection). Subordinate conditions can be handled by nested *CASE* statements when necessary.

Every rule must contain at least 1 valid CASE/WHEN/END statement.

```
BEGIN_LINK/END_LINK Statement Syntax
```

The syntax for BEGIN_LINK/END_LINK statements is as follows:

```
BEGIN_LINK(ELEMENT-TARGET)
{ASSIGNMENT-GROUP | CASE-STATEMENT}
END_LINK;
```

The key word LINK can appear in an assignment group as a proxy for the current element target that is being processed by the rule. This clause is not required.

Basic Functions

A series of standard arithmetic functions are provided for data manipulations that may need to be performed as part of a conversion rule. These functions correspond to the equivalents in Excel, SQL, or a typical programming language. Most rules will not require use of these functions other than perhaps *ROUND* and *TRUNC*, but they are provided for special situations that may arise.

The basic functions include the following:

```
ISNULL (EXPRESSION)

...evaluates to TRUE if the expression is NULL, FALSE otherwise

NUMERIC (EXPRESSION)

...converts a double-quoted string or string variable to a number

ROUND (EXPRESSION)

...rounds a result to an integer e.g., 1.8 becomes 2.

TRUNC (EXPRESSION)

...truncates a number to the next lowest integer value e.g., 1.2 becomes 1.
```

```
ABS (EXPRESSION)
```

... returns the absolute value of the expression e.g. -2 and 2 both return 2 RANDOM (EXPRESSION)

... uses expression as the seed for a random number generator. The expression must be numeric.

EXP (EXPRESSION)

... raises e to the expression's value. This is not a power function $e.g.\ y^x$

LOG (EXPRESSION)

... returns log of a number

SQRT (EXPRESSION)

... returns the square root of an expression

Special Functions²⁴

A series of predefined special functions particular to element states or the element inventory on a bridge are incorporated in the Migrator software. These are statements that result in an outcome value that can either be used in assignment or to set a condition to modify logic flow.

The following special functions are defined:

```
QUANTITY (ELEMENT-TARGET | THIS)
```

...returns the total quantity of the current element read from the data and/or transformed to alternate unit of measure

```
MAXSTATE (ELEMENT-TARGET | THIS)
```

...returns the maximum state value of the target scope

```
PCT (ELEMENT-TARGET | THIS, <state number>)
```

...determines percentage in a state in the target scope

```
SUMPCT (ELEMENT-TARGET | THIS, STATE-SET)
```

...sums the percentages in an element target across a set of states e.g. 3-4

EXISTS (<element | smart flag number>)

..proxy for EXISTS_S

EXISTS_S(<element | smart flag number>)

...returns true/false if the element or smart flag exists on the bridge (e.g., associated with the current element in context)

```
EXISTS_U(<element | smart flag number>)
```

...returns true/false if the element or smart flag exists on the particular structure unit of a bridge (e.g., associated with the current element in context)

```
SCALER( ELEMENT-TARGET | THIS)
```

...returns the value of the scale factor field for an element, following the Pontis convention. The scale factor set for an element data row typically is used as a multiplier on the element measure to reflect bridge-specific conditions, such as extra deep girders.

The final set of functions is as of version 1.1 of this document.

These built-in functions embed logic that any transform rule can simply incorporate, for example, to sum up percentages across element condition states. Note that the constants 1 and 0 correspond to true and false respectively, so a statement like *WHEN* (1) will always be executed.

User Defined Functions

User defined external functions are not supported by the Migrator in Release 1.1.

Keywords

THIS

The keyword *THIS* always represents the current element being processed. It is a constant in all contexts, and as such, a value cannot be assigned to it like a variable. This means that a statement like *THIS*=358 is illegal. The *THIS* keyword is very useful to automatically process a list scope without consideration of the specific element identifier(s) in the list.

I INK

The keyword *LINK* refers to the current element target of a *BEGIN_LINK*(*element target*) clause. It follows the same rules as the THIS keyword but may only appear within a *BEGIN_LINK*(*element target*)/*END_LINK* clause and only refers to the target element for the clause.

Constants

These are unchanging numbers or strings used within formulas for various purposes. They are not modifiable by any rule logic. For example, the metric conversion factor for feet to meters, or default deck quantity scaling factor would be expressed as constant decimals.

Variables

Variables are constant values associated with identifiers starting with a '@', e.g. @varName. . The name of any variable is arbitrary but should be mnemonic for understandability. The variable name must be at least 2 characters long (including the @), but not longer than 16 total characters, and may contain only upper and lower-case letters and numbers after the @ symbol without punctuation, spaces, dashes, or underscores.

Example variable names might be:

```
Good: @MyVarName123 <13 total characters, all upper/lower case letters and numbers>
Bad: @my$VarName <may not contain special characters such as this $>

Ugly: @My-Way$TooLong_VariableNameWithSpaces <violates length, spaces, and special characters rule>
```

Each variable is associated with a **numeric** value and defined in the *ENVIRONMENT-VARIABLES* section of the operating environment xml file. String variables are not supported. These variables are dynamically populated at runtime from the XML declarations for use in formulas as shorthand references.

In the *ENVIRONMENT-VARIABLES* section, these variables are declared as follows:

```
...-
<ENVIRONMENT-VARIABLES>
<Variable Name="@zero" Value="0" />
```

```
<Variable Name="@one" Value="1" />
</ ENVIRONMENT-VARIABLES>
...
```

Used in a formula, *@zero* would supply a constant value of 0. Similarly, a variable *@Feet Meters* could store the official conversion value for Feet to Meters, to override the default if necessary. This feature ensures that constants are valued and used identically in all rules by defining them correctly in one place and referring to them by name.

Variables may only be used on the right side of an equals sign. A statement like: ASSIGN_QUANT(@elm) = is **not** allowed, but an assignment statement like: ASSIGN_QUANT(12) = @coefficient * QUANTITY(THIS); is allowed.

Arithmetic Operators

These are the typical operators or symbols used for addition, subtraction, multiplication and division of numbers. The formal symbols are the set of $\{ + (adds \times to y) , - (subtracts \times from y), * (multiply \times by y) , / (divide \times by y) \}$ respectively.

No exponential or other higher-order operators are defined.

Logical Operators

These operators are used to construct logical statements such as AND, OR, NOT EQUAL, and others. These are augmented by the unary operators meaning 'NOT x' which transform an expression x to its opposite.

```
The formal symbols are the usual set of binary operators {AND , OR , = (x \text{ logical equal to } y) , <> (x \text{ not equal to } y), <= (x \text{ less than or equal to } y), < (x \text{ less than } y), >= (x \text{ greater than or equal to } y), > (x \text{ greater than } y)}..
```

Note that the logical equality operator is a single equals sign (=). These are extended with two equivalent unary logic operators in the set of $\{ \mid \mid NOT \mid \}$

Assignment Groups

Assignment statements are used to transfer the results of a transformation rule to a total quantity or percent of an element, or to a target state or states for an element, a type of element, or a category of element, or groups of each as appropriate. Again note that use of a target scope means fewer rules are required to perform the same transformations.

The examples shown earlier demonstrate a variety of legal assignment statements.

ASSIGN PCT

This statement applies the *percentage* determined by the contextual rule logic to the transform's target element scope. A target state number is also provided. Assignments to more than one element, e.g. a NBE and as smart flag within the same group are supported by using multiple ASSIGN_PCT statements.

Generalized:

```
ASSIGN_PCT(ELEMENT-TARGET, <state-number>) = {EXPRESSION}
e.g. ASSIGN_PCT(12, 3) = PCTSUM(12, 3,5) or
ASSIGN_PCT (12,1) = PCT(12,1)
```

ASSIGN QUANT

This command, as with ASSIGN_PCT, assigns the entire *quantity* of the element to the target scope, not considering condition state distribution. Assignments to more than one element, e.g. a NBE and as smart flag within the same group are supported by using multiple ASSIGN_QUANT statements.

Generalized:

```
ASSIGN_QUANT( ELEMENT-TARGET) = {EXPRESSION}
e.g. ASSIGN_QUANT (12) = QUANTITY (THIS
```

Element Targets

As shown in the previous section, each assignment statement must have an element target. This may be either a particular target AASHTO element by number or the keyword THIS indicating the current element being processed.

```
ELEMENT_TARGET: { <element number> | THIS } /* the keyword THIS may be used to address the element being processed */
```

Comments

A descriptive header and comments within the rule body are strongly encouraged. Any text may appear in a comment. Comments are not validated or spellchecked by the Migrator.

There are two types of comments supported in the rule syntax. First, typical C, C++, C# comments in the format /* some helpful comment goes here */ can be used to enter appropriate narrative about a formula, running over several lines if necessary. The starting and closing symbols must both be present. The other comment format is the C# // convention which can be used to comment an individual line.

Generalized, the two comment alternatives are as follows:

Extended Comments

Extended comments permit annotation of rule logic for documentation purposes, and are of arbitrary length. Any text or rule logic within the bounding symbols /* ... */is ignored by the rule processor.

```
/*
A long descriptive comment may be entered running over several lines if necessary.
A long descriptive comment may be entered running over several lines if necessary.
A long descriptive comment may be entered running over several lines if necessary
*/
```

In-line Comments

A typical in-line comment would either follow the rule statement or be entered on its own line. Each comment starts with two forward slashes (// <comment>). Typically these comments are shorter and focused on documenting a particular line of the rule. They should be on their own line and may not appear on the same line after a valid language statement. Any text or rule grammar following the double slashes is ignored by the rule processor. An unlimited number of these line-by-line comments may appear in a rule.

// A brief comment on its own line

Statement Terminator

All assignment statements must be terminated with a semicolon as shown in the several examples above. The *WHEN* clauses within a statement must have a corresponding *END*, but may not require a semicolon unless it is the terminating *END* for a rule. A missing semicolon will raise an exception during rule parsing (validation).

6. XML Schemas

The supporting files ElementData - 7.xsd and ElementConversion - 7.xsd contain the full specifications for the input and output element Xml data files and the transform rules and Migrator environment specifications respectively used by the command line program. These schemas are used to validate every Xml file in the Migrator, and can be used to check agency-generated xml files presumably coming from sources other than a Pontis database for compliance with the required schema.

Element Data

The Element Data schema is used to control Xml file contents for both CoRe and AASHTO elements. Every element data file will consist of two main sections —a DECLARATION, used to characterize the incoming or outgoing data, and a DATA section, consisting of the element condition data itself. Within each section, there are a number of Xml types supporting the exchange of element condition data.

In particular, for each element row, the element data's attributes are specified in xml as shown below. for the ElementDataRowType:

Figure 27 - ElementDataRowType xml type definition

Only the elemkey (element identifier) and quantity (total quantity of the element) attributes must be provided. All others are optional. The output AASHTO element ElementDataRowType will also define the associated element and target rollup element fields, as well as the source CoRe element(s).

In this Xml sequence, there are two Xml elements used: Condition-States, and Cargo. The Condition-States Xml element provides the state distribution of the bridge element. The *optional* Cargo element contains any associated data for an element condition row that the agency may wish to transfer 'as-is' from the input data to the transform output data, such as inspection notes or document reference keys, or even another whole Xml document, in an agency-specified Xml format that must be well-formed Xml and valid. This field is not processed by the Migrator other than to copy it intact to the output.

Element Conversion

This schema enforces bridge element definitions, in a fashion analogous to the Pontis ELEMDEFS table and its associated subordinate tables MATDEFS, ELTYPDFS, and ELCATDFS, as well as all the other Xml types required by the rule parser and validator. All elements are defined in this schema, with type, material, category, and other attributes. The official AASHTO element numbering is used.

The element format characteristics for every input and output element condition row are specified with this Xml schema. Any incoming CoRe elements that do not have a legal (defined) element identifier, for example, will fail validation and be rejected until either corrected or registered with this specifications file.

This file also supports the rule parser and contains a large number of types related to the internal rule validation and processing.

Additional Information

A full discussion of these schemas is beyond the scope of this user guide. Example files and the 2 schemas with embedded annotations are installed automatically under the program's working directory²⁵ in the Input subdirectory and are provided in the accompanying materials for further review.

48

²⁵ The working directory varies. Its location is specified during installation of the Migrator.

8. Standard Migration Rules

There are approximately 133 standard migration rules provided with the application. These rules cover all known, standard CoRe elements and Smart Flags and reflect the consensus decisions of bridge engineers from several States including CA, NY, SD, and OR as well as IT professionals involved with the development. These rules are installed with the software and can be found in the distribution media in the files <code>Default-Rules-Input.txt</code> and <code>Default-Compiled-Rules.xml</code> in the <code>Input</code> and <code>Output</code> subdirectories respectively.

While these rules have been thoroughly tested against several State element inspection inventories, these rules may need to be modified by user agencies to reflect customized CoRe element definitions and augmented with rules for custom agency elements. As a best practice, it is strongly recommended that the standard rules files be copied **before** any agency customization.

In the table below, rule ID, element scope, and smart flag association are indicated for each rule. Rules with Smart Flags involved are distinguished by NSF - No Smart Flag / SF 358 - Smart Flag 358 only / SF 359 - Smart Flag 359 only and SF358&SF359 - both Smart Flags associated with the CoRe element.

The support website provides the full rule text online for each given rule, which can be searched based on the IDs below.

Table 2 - List of Migrator Rules and Source CoRe Elements

Core	No SF	SF	SF	SF 358 &
Element	(NSF)	358	359	359
Category 1-	Superstru	cture		
101	х			
102	Х			
104				
105				
106	Х			
107				
109				
110				
111				
112	x			
	Element Category 1- 101 102 104 105 106 107 109 110 111	Element (NSF) Category 1- Superstru 101 x 102 x 104 105 106 x 107 109 110	Element (NSF) 358 Category 1- Superstructure 101	Element (NSF) 358 359 Category 1- Superstructure 101

Rule ID	Core Element	No SF (NSF)	SF 358	SF 359	SF 358 & 359
1113NSF	113	х			
1115	115				
1116	116				
1117	117				
1120NSF	120	X			
1121NSF	121	X			
1130NSF	130	Х			
1131NSF	131	X			
1135	135				
1140NSF	140	х			
1141NSF	141	Х			
1143	143				
1144	144				
1145	145				
1146	146				
1147	147				
1151NSF	151	Х			
1152NSF	152	X			
1154	154				
1155	155				
1156	156				
1160NSF	160	X			
1161NSF	161	x			
1330	330				
1331	331				
1332	332				
1333	333				

Category 2- Substructure	Rule ID	Core Element	No SF (NSF)	SF 358	SF 359	SF 358 & 359
2201NSF 201 x	1334	334				
2201NSF 201 x		Category 2	?- Substruc	rture		
2202NSF 202 x 2204 204 2205 205 2206 206 2210 210 2211 211 2215 215 2216 216 2217 217 2220 220 2225NSF 225 x 2226 226 2227 227 2228 228 2230NSF 230 x 2231NSF 231 x 2233 233 233 2234 234 234 2235 235 2240NSF 240 x		category z	o Bubbli de	rui c		
2204 204 204 205 205 205 2206 206 2210 210 2211 211 2215 215 2216 226 220 220 2225NSF 225 x 2226 226 2227 227 227 2228 228 228 228 2230NSF 230 x 2231NSF 231 x 2233 233 233 2234 234 234 2241 241	2201NSF	201	X			
2206 206 2210 210 2211 211 2215 215 2216 216 2217 217 2220 220 2225NSF 225 x 2226 226 2227 227 2228 228 2230NSF 230 x 2231NSF 231 x 2234 234 2235 235 2240NSF 240 x 2241 241	2202NSF	202	Х			
2206 206 2210 210 2211 211 2215 215 2216 216 2217 217 2220 220 2225NSF 225 x 2226 226 2227 227 2228 228 2230NSF 230 x 2231NSF 231 x 2233 233 233 2234 234 234 2235 235 2240NSF 240 x 2241 241 241	2204	204				
2210 210 2211 211 2215 215 2216 216 2217 217 2220 220 2225NSF 225 x 2226 226 2227 227 2228 228 2230NSF 230 x 2233 233 2234 234 2235 235 2240NSF 240 x 2241 241	2205	205				
2211 215 2216 216 2217 217 2220 220 2225NSF 225 x 2226 226 2227 227 2228 228 2230NSF 230 x 2231NSF 231 x 2233 233 233 2234 234 2235 235 2240NSF 240 x 2241 241	2206	206				
2215 216 2217 217 2220 220 2225NSF 225 x 2226 226 2227 227 2228 228 2230NSF 230 x 2231NSF 231 x 2233 233 2234 234 2235 235 2240NSF 240 x 2241 241	2210	210				
2216 216 2217 217 2220 220 2225NSF 225 x 2226 226 2227 227 2228 228 2230NSF 230 x 2231NSF 231 x 2233 233 2234 234 2235 235 2240NSF 240 x 2241 241	2211	211				
2217 217 2220 220 2225NSF 225 x 2226 226 2227 227 2228 228 2230NSF 230 x 2231NSF 231 x 2233 233 2234 234 2235 235 2240NSF 240 x 2241 241	2215	215				
2220 220 2225NSF 225 x 2226 226 2227 227 2228 228 2230NSF 230 x 2231NSF 231 x 2233 233 233 2234 234 2235 235 2240NSF 240 x 2241 241	2216	216				
2225NSF 225 x 2226 226 2227 227 2228 228 2230NSF 230 x 2231NSF 231 x 2233 233 2234 234 2235 235 2240NSF 240 x 2241 241	2217	217				
2226 226 2227 227 2228 228 2230NSF 230 x 2231NSF 231 x 2233 233 2234 234 2235 235 2240NSF 240 x 2241 241	2220	220				
2227 227 2228 228 2230NSF 230 x 2231NSF 231 x 2233 233 2234 234 2235 235 2240NSF 240 x 2241 241	2225NSF	225	Х			
2228 228 2230NSF 230 x 2231NSF 231 x 2233 233 2234 234 2235 235 2240NSF 240 x 2241 241	2226	226				
2230NSF 230 x 2231NSF 231 x 2233 233 2234 234 2235 235 2240NSF 240 x 2241 241	2227	227				
2231NSF 231 x 2233 233 2234 234 2235 235 2240NSF 240 x 2241 241	2228	228				
2233 233 234 234 235 235 240NSF 240 x 2241 241	2230NSF	230	Х			
2234 234 235 235 2240NSF 240 x 2241 241	2231NSF	231	Х			
2235 235 2240NSF 240 x 2241 241	2233	233				
2240NSF 240 x 2241 241	2234	234				
2241 241	2235	235				
	2240NSF	240	X			
2242 242	2241	241				
	2242	242				

Rule ID	Core Element	No SF (NSF)	SF 358	SF 359	SF 358 & 359
2243	243				
	Catego	ry 3- Joint	·s		
3300	300				
3301	301				
3302	302				
3303	303				
3304	304				
	Category	v 4- Bearin	igs		
4310	310				
4311	311				
4312	312				
4313	313				
4314	314				
4315	315				
	Category 5-	Other Ele	ments		
5320	320				
5321	321				
	Category (6- Decks/S	labs		
6012+NSF	12	Х			
6012+SF358	12		X		
6012+SF358SF359	12				х
6012+SF359	12			x	

Rule ID	Core Element	No SF (NSF)	SF 358	SF 359	SF 358 & 359
6013+NSF	13	х			
6013+SF359	13			x	
6014+NSF	14	Х			
6014+SF359	14			х	
6018+NSF	18	х			
6018+SF358	18		Х		
6018+SF358SF359	18				х
6018+SF359	18			х	
6022+NSF	22	X			
6022+SF358	22		Х		
6022+SF358SF359	22				х
6022+SF359	22			Х	
6026+NSF	26	Х			
6026+SF358	26		Х		
6026+SF358SF359	26				Х
6026+SF359	26			х	
6027+NSF	27	Х			
6027+SF358	27		Х		
6027+SF358SF359	27				х
6027+SF359	27			х	
602829	28, 29				
6030	30				
603154	31, 54				
6032	32				
6038+NSF	38	x			
6038+SF358	38		х		
6038+SF358SF359	38				x

D 1 ID	Core	No SF	SF	SF	SF 358 &
Rule ID	Element	(NSF)	358	359	359
6038+SF359	38			x	
6039+NSF	39	X			
6039+SF359	39			х	
6040+NSF	40	х			
6040+SF359	40			X	
6044+NSF	44	X			
6044+SF358	44		х		
6044+SF358SF359	44				х
6044+SF359	44			X	
6048+NSF	48	Х			
6048+SF358	48		Х		
6048+SF358SF359	48				х
6048+SF359	48			X	
6052+NSF	52	х			
6052+SF358	52		Х		
6052+SF358SF359	52				х
6052+SF359	52			Х	
6053+NSF	53	X			
6053+SF358	53		Х		
6053+SF358SF359	53				х
6053+SF359	53			X	
	Category 7- D	efect/Sma	rt Flags		
7356	356				
7357	357				
7360	360				

	Rule ID	Core Element	No SF (NSF)	SF 358	SF 359	SF 358 & 359
7361		361				
7362		362				
7363		363				

9. Glossary of Terms

The following terms and acronyms are used in this document.

 ${\bf Table~3-Gloss ary~of~Terms}$

Glossary of Terms				
TERM	MEANING			
© Bridgeware	The various AASHTO bridge related software products including Pontis, Virtis, and Opis, with various release levels by product.			
© Pontis	The AASHTO Pontis Bridge Management System			
AASHTO	The American Association of State Highway and Transportation Officials			
AASHTO elements	Elements defined according to the new specification from the BEM. There are 4 types — national (NBE), bridge management (BME), and agency-defined elements (ADE), and the newly defined Defect Flags (DF)			
ADE	Agency Defined Elements – elements defined by an individual agency either anew or as derivatives of a NBE or BME			
Associations	The links between protective systems and primary structural elements. Protective system condition data rows will contain the key of the element that they protect.			
BEM	AASHTO Guide Manual for Bridge Element Inspection – "the Bridge Element Manual", first published January 2011			
BME	Bridge Management (AASHTO) Elements, may vary in specification by state			
Case	A logical branching structure that permits a decision tree to be expressed in the rule grammar.			
Chaining	The linked transforms rules applied to any source element. Conversion logic for every element must			

	be supplied by one of the chained transforms or an error is raised.
Command line arguments/switches	Any switch flags that follow the name of the program when run from a command prompt e.g. Migrator -? uses the question mark? to tell the program to show help for the command line Migrator. The Visual Element Migrator does not use command line switches.
Condition states	The distribution of condition for an element by percent and quantity, ranging from like-new to poor. All AASHTO elements have 4, CoRe elements vary from 3 to 5. The states are assigned during field inspections. Deterioration paths, the projected transitions between condition states, are defined by bridge management models.
CoRe elements	Co mmonly Re cognized elements – the old-style specification for AASHTO elements
Defect Flags	The successor to Smart Flags in the new AASHTO specification. The role of 'Defect Flag' is different, however, from that of Smart Flags
Link	A Migrator rule clause that will automatically generate a protective system element for any source structural element e.g. the paint for a painted steel girder.
Migrate, convert, transform, translate	Proxies for element state conversions from CoRe condition states to AASHTO Element states, following the configurable transform rules
Migrator	The AASHTO Element Migration programs
MVVM	A Windows Presentation Foundation (WPF) and Silverlight design pattern that mandates loose coupling between layers and separation of concerns between layers as part of its design philosophy
NBE	National Bridge Elements, common to many states and identically specified nationally for Federal reporting purposes
Primary Structural Element	Bridge components such as girders, joints, abutments, decks etc. These may or may not be associated with <i>protective systems</i> such as paint, membranes, etc.

Protective Systems	Any system applied to a <i>primary structural element</i> to protect it from deterioration and damage with the intent of extending its service life and function.
Rollup	A rule that indicates the NBE with which an element is associated when consolidating quantities and condition state distributions. Any element that can be rolled up will contain the element key of its rollup target or parent within its data.
Target	The target element for a transform
Transform	A migration rule
Xml	The eXtensible Markup Language, used by the application to store all parsed rules, environment info, and input and output element data.

10. Document Change History

Version1.3 – Revised Final Draft – August 21, 2012 –(ARMarshall) Removed sections discussing the command line migrator per Task Force direction, adjusted text as necessary, spellcheck, revised index, table of contents, list of exhibit. Some rewording of introduction and GUI overview sections. Accompanies product release 1.1.0.19.

Version1.2 – Revised Final Draft – June 30, 2012 – (ARMarshall) Added an index and 1 appendix: an overview and guide to the rules, organized command line parameter discussion, and retitled the manual.

Version 1.1 – Final Draft – March 1, 2011 – (ARMarshall) Extensive rework and reformatting, updated to include discussion of rollup rules and link clauses, embeds rules Word document from final rules version.

Version 1.0 - Initial Draft — May 11, 2011, by Allen R. Marshall, Allen R. Marshall Consulting LLC, and Dmitry I. Gurenich, Ph.D., Gurenich Consulting LLC. Portions adapted from the original design document.

Appendix A-Installed Migrator Files

This appendix contains a list of files and folders included with the standard install of the migrator application.

Migrator Installed File Organization

The typical directory organization and files installed is shown below. The example is representative since these directories may be different in an agency installed environment. The user working directory is set during installation, and the program file installation can also be changed if necessary to accommodate agency standards. This application has not been tested with network program installation or under Citrix.

Organization of a Typical User's Working Directory

C:\AASHTOWare\Visual Element Migrator

migrator-log4net-debug.config

```
migrator-log4net.config
VisualElementMigrator.exe.config
\Databases\
      \Sample
             Pontis-Sample-2005_Data.mdf
             Pontis-Sample-2005_Log.ldf
             Pontis51-Sample.mdf
             Pontis51-Sample_Log.ldf
       \Default-Files\
             \label{eq:help}
                    Migrator 1.1 Help.mchelp
                    MigratorToolTips.xaml
                    \Source\
                           MigratorToolTips.docx
                           MigratorToolTips.xaml
             \Input\
                    Default-Element-Specifications.xml
                    Default-Operating-Environment.xml
                    Default-Rules-Input.txt
                    ElementConversion - 7.xsd
                    ElementData - 7.xsd
                    Sample-Pontis-CoreElementData.xml
             \Output\
                    Default-Compiled-Rules.xml
                    Parser-Errors.err
```

Sample-Migrated-AASHTOElementData.xml Transform-Errors.err Transform-Processing.log VisualElementMigrator.exe

Help *Input*

> Default-Element-Specifications.xml Default-Operating-Environment.xml

Default-Rules-Input.txt

ElementConversion - 7.xsd

ElementData - 7.xsd

Sample-Pontis-CoreElementData.xml

 $\land Logs \land$

Migrator-debug.log

Migrator.log

README-CONTENTS.txt

Session-Messages.pdf

\Output\

Default-Compiled-Rules.xml

Parser-Errors.err

Sample-Migrated-AASHTOElementData.xml

Transform-Errors.err

Transform-Processing.log

 \References

 \Docs

Conversion Rules Grammar 11.docx Element Migration Programs User Guide (1.1.0.19).docx Element Migration Programs User Guide (1.1.0.19).pdf

\Third-Party\

CreativeCommons-license.pdf

Silk-Icons-Readme.txt

VistaICO-Aero-Icons-readme.txt

MadCap-Flare-License.rtf

MadCap-Flare-REDISTRB.TXT

\XmlDocs\

AASHTO Element Migration Common.xml

AASHTOElementMigrationTools.xml

GalaSoft.MvvmLight.Extras.WPF4.xml

 ${\bf Gala Soft. MvvmLight. WPF4.xml}$

ICSharpCode.AvalonEdit.xml

log4net.xml

Microsoft.Expression.Interactions.xml

Microsoft.Practices.ServiceLocation.xml

Microsoft.Practices.Unity.Configuration.xml

Microsoft.Practices.Unity.Interception.Configuration.xml

Microsoft.Practices.Unity.Interception.xml

Microsoft.Practices.Unity.xml

ResourceLibrary.xml

System. Windows. Interactivity.xml

Telerik.Windows.Controls.Data.xml

Telerik.Windows.Controls.Docking.xml

Telerik.Windows.Controls.Gauge.xml

Telerik.Windows.Controls.GridView.xml

Telerik.Windows.Controls.ImageEditor.xml

Telerik.Windows.Controls.Input.xml

Telerik.Windows.Controls.Navigation.xml

Telerik.Windows.Controls.RibbonBar.xml

Telerik. Windows. Controls. Ribbon View. xml

Windows.Controls.RichTextBoxUI.xml

Telerik.Windows.Controls.xml

Telerik.Windows.Data.xml

Telerik.Windows.Documents.FormatProviders.Pdf.xml

Telerik.Windows.Documents.FormatProviders.Rtf.xml

Telerik. Windows. Documents. Proofing. Dictionaries. En-US.xml

Telerik.Windows.Documents.xml

Telerik. Windows. Zip.xml

XmlDocs\VisualElementMigrator.XML

 \Temp

Organization of the Program Directory

C:\Program Files (x86)\AASHTOWare\Visual Element Migrator\

AASHTO Element Migration Common.pdb

AASHTOElementMigrationTools.dll

AASHTOElementMigrationTools.pdb

B4.AppLibrary.dll

GalaSoft.MvvmLight.Extras.WPF4.dll

GalaSoft.MvvmLight.Extras.WPF4.pdb

GalaSoft.MvvmLight.WPF4.dll

GalaSoft.MvvmLight.WPF4.pdb

ICSharpCode.AvalonEdit.dll

ICSharpCode.AvalonEdit.pdb

Ionic.Zip.dll

log4net.dll

MadCap.HelpViewerEmbeddedClient.dll

Microsoft.Expression.Interactions.dll

Microsoft.Practices.ServiceLocation.dll

Microsoft.Practices.ServiceLocation.pdb

Microsoft.Practices.Unity.Configuration.dll

Microsoft.Practices.Unity.dll

Microsoft.Practices.Unity.Interception.Configuration.dll

Microsoft.Practices.Unity.Interception.dll

ResourceLibrary.dll

ResourceLibrary.pdb

System.Windows.Interactivity.dll

Telerik.Windows.Controls.Data.dll

Telerik.Windows.Controls.Data.pdb

Telerik.Windows.Controls.dll

Telerik.Windows.Controls.Docking.dll

Telerik. Windows. Controls. Docking.pdb

Telerik.Windows.Controls.Gauge.dll

Telerik.Windows.Controls.Gauge.pdb

Telerik.Windows.Controls.GridView.dll

Telerik.Windows.Controls.GridView.pdb

Telerik.Windows.Controls.ImageEditor.dll

Telerik.Windows.Controls.ImageEditor.pdb

Telerik.Windows.Controls.Input.dll

Telerik.Windows.Controls.Input.pdb

Telerik.Windows.Controls.Navigation.dll

Telerik.Windows.Controls.Navigation.pdb

Telerik.Windows.Controls.pdb

Telerik.Windows.Controls.RibbonBar.dll

Telerik.Windows.Controls.RibbonBar.pdb

Telerik. Windows. Controls. Ribbon View. dll

Telerik.Windows.Controls.RibbonView.pdb Telerik.Windows.Controls.RichTextBoxUI.dll

The state of the s

Telerik. Windows. Controls. Rich Text Box UI. pdb

Telerik.Windows.Data.dll

Telerik.Windows.Data.pdb

Telerik.Windows.Documents.dll

Telerik.Windows.Documents.FormatProviders.Pdf.dll

Telerik.Windows.Documents.FormatProviders.Pdf.pdb

Telerik.Windows.Documents.FormatProviders.Rtf.dll

Telerik.Windows.Documents.FormatProviders.Rtf.pdb

Telerik.Windows.Documents.pdb

Telerik.Windows.Documents.Proofing.Dictionaries.En-US.dll

Telerik.Windows.Documents.Proofing.Dictionaries.En-US.pdb

Telerik.Windows.Zip.dll

Telerik.Windows.Zip.pdb

unins000.dat

unins000.exe

VisualElementMigrator.exe

VisualElementMigrator.exe.config

VisualElementMigrator.instr.pdb

VisualElementMigrator.pdb

VisualElementMigrator.XML

WPFToolkit.dll

 $\label{eq:help}$

Migrator 1.1 Help.mchelp

MigratorToolTips.xaml

 $\log s$

Migrator-debug

Index

Agency	general syntactical layout, 36
data modifications, 1	keywords, 44
rules modifications, 2	language elements overview, 35
Change History, 59	logical operators, 45
Command Line	protective systems syntax, 30
and directory privileges, 4	ROLLUP directive, 41
Mode T - transform element data overview, 25	rollup rules syntax, 31
Comments	rule examples, 25–31
extended comments, 46	SCOPE directive, 41
in-line comments, 47	special functions, 43–44
overview, 46	syntax element reference guide, 36–40
Database	TRANSFORM directive, 40
configuring connection in GUI, 18	user defined functions, 44
connect strings, 6, 18	variables, 44–45
connecting overview, 5	GUI
requirements, 4	additional transformation options, 19-20
user privileges, 5	database settings, 18
Directory Organization	grid view, 21
and installation, 7	GUI flags, 18–19
default subfolders, 7	key characteristics, 11
locations, 4	miscellaneous settings, 20
program home, 9	module 1 - Edit Migrator Rules, 13–16
Elements	module 2 - CoRe elements, 16
ADE, 1, 13	module 3 - AASHTO Elements, 16-17
and custom specifications, 32-34	module 4 - Program Settings, 17-21
background, 2	sorting data, 22
BME, 1, 13	switching display theme, 20
condition states, 1	user interface overview, 11
CoRe, 3, 13, 30	Installation
defect/smart flags, 13, 25	GUI, 7–9
NBE, 1, 13	operating environment requirements, 4
protective systems, 25, 30	removing the program, 9
rollup, 25, 31	source scope, 25
specifications overview, 2	summary, 7
Filters	supported operating systems, 3
clearing filters on the data, 24	system requirements, 3
creating and applying data filters, 22–24	upgrades, 9
filtering and sorting data, 12–13	Migrator
not restored on reopening application, 24	background, 2
using a WHERE clause, 18	overview, 2
Grammar and Syntax	Rules
arithmetic operators, 45	background, 25
assignment groups, 45–46	combining duplicate elements, 32
basic functions, 42–43	conventions, 15
constants, 44	deprecating elements, 32
control structures overview, 41–42	editing rules, 14
element targets, 46	historical scope, 34
EXCEPTION directive. 41	renumbering elements, 32

rule chaining, 31 scope, 32 definition, 25 structural scope, 34 syntax examples, 25–31 transferring custom element specifications, 32

SQL adding a cutoff date, 18 standard download SELECT statement, 5 XML Schemas element conversion schema overview, 50 element data schema overview, 50